

Accredited "A" by DGHE (DIKTI), Decree No.58/DIKTI/Kep/2013  
and Indexed by SCOPUS (Elsevier Product)

ISSN 1693-6930

# TELKOMNIKA

Telecommunication, Computing, Electronics and Control

Vol. 11 No. 4, December 2013



Published by  
Universitas Ahmad Dahlan (UAD), Yogyakarta, Indonesia  
and  
Institute of Advanced Engineering and Science (IAES)





# TELKOMNIKA

TELKOMNIKA (Telecommunication, Computing, Electronics and Control) is a peer reviewed international journal. The journal is first published on December 2003. The aim of the journal is to publish high-quality articles dedicated to all aspects of the latest outstanding developments in the field of electrical engineering. Its scope encompasses the applications of telecommunication, signal processing, applied computing and informatics, control, and electrical and electronics engineering.

## Editor-in-Chief

### Tole Sutikno

Universitas Ahmad Dahlan  
Yogyakarta, Indonesia  
email: thsutikno@ieee.org

## Co-Editor-in-Chief Signal Processing Arianna Mencattini

Department of Electronic Engineering  
University of Rome "Tor Vergata"  
Roma, Italy  
email: mencattini@ing.uniroma2.it

## Control Engineering Omar Lengerke

Mechatronics Engineering Faculty  
Universidad Autonoma de Bucaramanga  
Bucaramanga, Colombia  
olengerke@unab.edu.co

## Electronics Engineering

### Mark S. Hooper

Analog/mixed signal/RFIC Design  
IEEE Consultants Network of Silicon Viley  
California, USA  
m.hooper@ieee.org

## Power Engineering

### Auzani Jidin

Dept of Power Electronics and Drive  
Universiti Teknikal Malaysia Melaka  
Melaka, Malaysia  
auzani@utem.edu.my

## Telecommunications Engineering Sunardi

Dept. of Electrical Engineering  
Universitas Ahmad Dahlan  
Yogyakarta, Indonesia  
email: sunargm@ieee.org

## Computing and Informatics Wanquan Liu

Dept of of Computing  
Curtin University of Technology  
Perth WA, Australia  
w.liu@curtin.edu.au

## Editors

### Ahmad Saudi Samosir

Universitas Lampung  
Lampung, Indonesia  
saudi@ieee.org

### Deris Stiawan

Sriwijaya University  
Palembang, Indonesia  
deris@ieee.org

### Jyoteesh Malhotra

Guru Nanak Dev University  
Punjab, India  
jyoteesh@gmail.com

### Lunchakorn Wuttisittikulki

Chulalongkorn University  
Bangkok, Thailand  
Lunchakorn.W@chula.ac.th

### Nik Rumzi Nik Idris

Universiti Teknologi Malaysia  
Johor, Malaysia  
nikrumzi@ieee.org

### Surinder Singh

Sant Longowal Inst of Eng &  
Tech  
Punjab, India  
surinder\_sodhi@rediffmail.com

### Yin Liu

Symantec Research Labs Core  
Symantec Corporation  
Mountain View, CA, USA  
liuy@cs.rpi.edu

### Bimal K. Bose (USA)

### Hamid A. Toliyat (USA)

Abdul Fadlil  
Adhi Susanto

### Journal Manager

Kartika Firdausy  
kartika@ee.uad.ac.id

### Ahmet Teke

Çukurova University  
Adana, Turkey  
ahmetteke@cu.edu.tr

### Fayçal Djefal

University of Batna  
Batna, Algeria  
faycaldzdz@hotmail.com

### Jumril Yunas

Universiti Kebangsaan Malaysia  
Kuala Lumpur, Malaysia  
jumrilyunas@ukm.my

### Mochammad Facta

Universitas Diponegoro  
Semarang, Indonesia  
facta@ieee.org

### Shahrin Md Ayob

Universiti Teknologi Malaysia  
Johor, Malaysia  
shahrin@fke.utm.my

### Tarek Bouktir

Larbi Ben Mhidi University  
Oum El-Bouaghi, Algeria  
tarek.bouktir@esrgroups.org

### Youssef Said

Ecole Nationale d'Ingenieurs de  
Tunis  
Tunis, Tunisia  
y.said@ttnet.tn

### Balza Achmad

Universitas Gadjah Mada  
Yogyakarta, Indonesia  
balzach@gadjahmada.edu

### Irwan Prasetya Gunawan

Bakrie University  
Jakarta, Indonesia  
Irwan.gunawan@bakrie.ac.id

### Leo P. Ligthart

Delft University of Technology  
Delft, Netherlands  
L.P.Ligthart@tudelft.nl

### Munawar A Riyadi

Universitas Diponegoro  
Semarang, Indonesia  
munawar.riyadi@ieee.org

### Srinivasan Alavandar

Caledonian Univ. of Engineering  
Sib, Oman  
seenu.phd@gmail.com

### Tutut Herawan

Universiti Malaysia Pahang  
Pahang, Malaysia  
tutut@ump.edu.my

### Yutthapong Tuppadung

Provincial Electricity Authority  
Bangkok, Thailand  
ytuppadung@gmail.com

### D. Jude Hemanth

Karunya University  
Tamil Nadu, India  
jude\_hemanth@rediffmail.com

### Jacek Stando

Technical University of Lodz  
Lodz, Poland  
Jacek.stando@p.lodz.pl

### Linawati

Universitas Udayana  
Bali, Indonesia  
linawati@unud.ac.id

### Nidhal Bouaynaya

Univ. of Arkansas at Little Rock  
Little Rock, Arkansas, USA  
nxbouaynaya@ualr.edu

### Supavadee Aramvith

Chulalongkorn University  
Bangkok, Thailand  
supavadee.a@chula.ac.th

### Yang Han

University of Electronic Science and  
Technology of China  
Chengdu, P. R. China  
hanyang\_facts@hotmail.com

## Advisory Editors

Jazi Eko Istiyanto (Indonesia)

Muhammad H. Rashid (USA)

Neil Bergmann (Australia)

Patricia Melin (Mexico)

## Publishing Committee

### Advisory Boards

Adi Soeprijanto  
Kais Ismail Ibraheem

Hermawan  
Muchlas

### Subscription Manager

Anton Yudhana  
eyudhana@yahoo.com

The TELKOMNIKA is published by Universitas Ahmad Dahlan and Institute of Advanced Engineering and Science. The journal accredited A by DGHE, Ministry of National Education, Indonesia, in Decree No. 58/DIKTI/Kep/2013. The decree is valid until August 2018.

Responsibility of the contents rests upon the authors and not upon the publisher or editor.

Publisher address:

**Department of Electrical Engineering, Universitas Ahmad Dahlan (UAD)**  
Jalan Prof. Soepomo Janturan, Yogyakarta, Indonesia 55164  
Telp. +62 274 379418, 563515, 511829, 511830, 371120 Fax. +62 274 564604  
Website: <http://www.telkomnika.ee.uad.ac.id>  
e-mail: [telkomnika@ee.uad.ac.id](mailto:telkomnika@ee.uad.ac.id), [telkomnika@journal.uad.ac.id](mailto:telkomnika@journal.uad.ac.id), [thsutikno@ieee.org](mailto:thsutikno@ieee.org)

## Table of Contents

### Regular Papers

De-noising of Power Quality Disturbance Detection Based on Ensemble Empirical Mode Decomposition Threshold Algorithm Xuhong Zhang, Gang Han, Liping Chen	637
Analytical Calculation of Coupled Magnetothermal Problem in Gas Insulated Transmission Lines Guoxia Sun, Xiangchao Jin, Zhiyang Xie	645
A Design Study of Dual-Stator Permanent Magnet Brushless DC Motor Yaling Wang, Yanliang Xu	653
Renewable Distributed Generation Models in Three-Phase Load Flow Analysis for Smart Grid Syafii Syafii, K. M. Nor	661
Design and Modeling of an Integrated Micro-Transformer in a Flyback Converter M. Derkaoui, A. Hamid, T. Lebey, R. Melati	669
Research of NiMH Battery Modeling and Simulation Based on Linear Regression Analysis Method Chang-hao Piao, Qing-yong Qin, Yong-sheng Zhang, Qian Zhang	683
Study of an Improved Fuzzy Direct Torque Control of Induction Motor Ming Dong, Tang Yong-qi, Song Hai-liang, Wang Bing-jie	691
Optimization of Membership Functions for the Fuzzy Controllers of the Water Tank and Inverted Pendulum with Different PSO Variants Resffa Fierro, Oscar Castillo, Fevrier Valdez, Patricia Melin	699
Fuzzy Adaptive PID Control of a New Hydraulic Erecting Mechanism Liang Li, Jian Xie, Wei Li	715
Study on Thermal Conductivity Methane Sensor Constant Temperature Detection Method Xi-bo Ding, Xiao-yan Guo, Yue-chao Chen, Xue Sun, Zhao-xia Li	725
Two-phase Flow Visualization Employing Gauss-Newton Method in Microchannel Yonghong Liu, Mingyan Zu, Xiantao Wang, Je-Eun Choi	733
Time Series Based for Online Signature Verification Pande Sutawan, Darma Putra	739
Palmprint Verification Using Time Series Method Agus Anwar, Darma Putra, Agung Cahyawan	749
Application of Wavelet Analysis in Detecting Runway Foreign Object Debris Guo Xiao-jing, Yang Xue-you, Yu Zhi-jing	759
A Camera Self-Calibration Method Based on Plane Lattice and Orthogonality Yue Zhao, Jianchong Lei	767
Feature Extraction of Composite Damage on Acoustic Emission Signals Han Wen Qin, Zhou Jin Yu	775

---

Separability Filter for Localizing Abnormal Pupil: Identification Criteria of Input Image Retno Supriyanti, Elvin Pranata, Yogi Ramadhani, Tutik Ida Rosanti	783
Localizing Region Based Level Set Contouring for Common Carotid Artery in Sonography Yong Chen, Xiao Ming Zhou, Dong C Liu	791
Ovarian Cancer Identification using One-Pass Clustering and k-Nearest Neighbors Isye Ariesanti, Yudhi Purwananto, Handayani Tjandrasa	797
Circularly Polarized Proximity-Fed Microstrip Array Antenna for LAPAN TUBSAT Micro Satellite System Muhammad Darsono, Endra Wijaya	803
Power Balance AODV Algorithm of WSN in Agriculture Monitoring Dengyuan Xu, Shuzhen Pu, Shixun Wu, Benniu Zhang, Xiaoqin Qin	811
A Review of Communications Protocol for Intelligent Remote Terminal Unit Development Mohd Ruddin Ab. Ghani, Wan Nor Shela Ezwane W. Jusoh, Mohd Ariff M. Hanafiah, Siti Hajar Raman, Zanariah Jano	819
Future Smart Cooking Machine System Design Alif Ahmad Syamsudduha, Dyah Pratiwi, Ardhani Reswari Yudistari, Jonathan Hindharta, Dewi Agushinta R.	827
Improved Harmony Search Algorithm with Chaos for Absolute Value Equation Longquan YONG, Sanyang Liu, Shouheng Tuo, Kai Gao	835
A Mobile Ecotourism Recommendations System Using Cars-Context Aware Approaches Neny Rosmawarni, Taufik Djatna, Yani Nurhadryani	845
Streamed Sampling on Dynamic data as Support for Classification Model Astried Silvanie, Taufik Djatna, Heru Sukoco	855

## Circularly Polarized Proximity-Fed Microstrip Array Antenna for Micro Satellite

Muhammad Darsono, Endra Wijaya\*

Electrical Engineering Department, Faculty of Engineering, Darma Persada University  
Radin Intan II street (Terusan Casablanca), Phone; +62-021- 8649057 (ext: 2018)  
Fax: 021-8649052, Jakarta 13450, Indonesia

\*Corresponding author, e-mail: em\_darsono@yahoo.co.id, endrawijaya.86@gmail.com

### Abstrak

Perancangan antena array microstrip dengan sifat polarisasi sirkular dikembangkan guna mendukung teknologi satelit mikro. Antena array polarisasi sirkular ini digunakan untuk pengiriman data yang beroperasi di frekuensi S band dari satelit ke stasiun bumi. Penelitian ini menggunakan rancangan array patch dengan teknik proximity coupling untuk memperoleh gain tinggi dan bandwidth lebar. Struktur antena array terdiri dari empat elemen patch persegi yang identik sedangkan untuk saluran transmisi menggunakan konsep corporate fed network dengan tiga power divider transformer seperempat lambda-T-junction. Bandwidth impedansi matching untuk resonansi antara dua patch system antena pada frekuensi tengah 2,25 GHz adalah  $\frac{3}{4} \lambda$ . Antena dirancang menggunakan metode momen. Simulasi dilakukan menggunakan aplikasi microwave office software. Hasil dari simulasi dan pengukuran antena diperoleh adalah: bandwidth dari return loss < -10 dB diatas 100 MHz untuk frekuensi resonansi bergeser 1,75%, VSWR (1 sampai 2) dan bandwidth dari axial ratio < 3 dB adalah 1,6% (narrowband) dan directivity maksimum (Gain) adalah 9,128 dB. Secara keseluruhan hasil studi antena array memperlihatkan kinerja baik dengan sifat polarisasi sirkular, gain tinggi dan beroperasi di daerah frekuensi S band system satelit mikro.

**Kata kunci:** antena mikrostrip, patch array, polarisasi sirkular, coupling proximity, S band.

### Abstract

Design of circular polarization microstrip antenna array was developed to support micro-satellite technology. Circular polarization antenna array used for data transmission applications operating in the S band frequencies from the satellite to the ground station. In this study of the patch array using proximity coupling techniques in this study to obtain high gain and wide of bandwidth. The structure of the antenna array design consists of four identical square patch elements and to use the concept of corporate transmission line fed power divider network uses three transformers quarter-lambda T-junction. Bandwidth impedance matching for resonance between two patches is  $\frac{3}{4} \lambda$  antenna system for center frequency of 2.25 GHz. The antenna is designed using the method of moments through simulation with microwave office software applications. The results of simulations and measurements obtained antenna parameters, such as: bandwidth of return loss < -10 dB above 100 MHz resonant frequency shifted to 1.75%, VSWR (1 to 2), the bandwidth of axial ratio < 3 dB is 1.6% (narrowband) and the maximum directivity (gain) is 9.128 dB. Overall study results showed good performance antenna array with circular polarization properties, high gain and operates in the S band frequency micro satellite system.

**Keywords:** microstrip antenna, array patch, circular polarization, proximity coupling, S band.

### 1. Introduction

One of the important applications of microstrip antennas is their use in transmitting or receiving system that require circular polarization. The LAPAN TUBSAT micro satellite is the first micro satellite owned by LAPAN (National Aeronautics and Space Agency) Indonesia. The satellite was launched in 2005 with the strategic mission, such as surveillance activities, navigation and remote sensing [1]. The LAPAN TUBSAT micro satellite has a square shape with a size of 45 cm x 45 cm x 27 cm. This micro satellite operating in S band frequencies to payload remote sensing (2.2 GHz -2.3 GHz) and transmit data to ground stations with a speed of 1200 bps [1-3].

The microstrip array patch (1x4) antenna designed and developed to support sub system of micro satellite technology. Antenna array design is the study as a comparison against the helical antenna applications that currently use the micro satellites as show in figure 10 [3]. In this case study, the design of the antenna is made up through the approach of parameter values and characteristics of the antenna as well as the physical dimensions of the body size of a micro satellite. So that the ultimate goal of this study obtained a prototype antenna that has the form of a minimum size of the body wall and optimal performance in the S band frequencies with circular polarization of the micro satellites.

Circularly polarised microstrip array are classified into three major categories .The study of array antenna with use for design use method of arrays which are composed of circularly polarised microstrip patch. For design corporate fed network of transmission line distribution to connecting each patch radiators used power divider transformers of T-junction type [4-5]. For the design of antenna array (1x4) in simulation process conducted with reconstruction model of the typical circularly polarised patches antenna as shown in figure1. For resonance frequencies result of composed linear between spaces of two patches as sub array circularly polarized [6]. The feeding technique of proximity coupled is used in design needed two layers substrate material, where the structure of composed fourth patches identical design in upper layer and the structure of corporate fed network design in bottom layer [7]. In this design of antenna, the substrate material type using duroid RT 5880 specification has thickness is 1.57mm and dielectric constant of 2.2 [8]. The design of antenna used method of moments by simulation using microwave office software applications. The target of antenna parameter is the bandwidth of return loss below 10 dB, the VSWR (Voltage Standing Wave Ratio) 2:1, bandwidth of axial ratio below 3 dB, and a maximum directivity (gain) of 8 dB [3].

The prototype of antenna array design obtained is show form has the dimensions for the length and width of an area smaller than the size of the satellite body wall. Results of the prototype antenna measurements conducted in the laboratory of electrical engineering department University Indonesia shows the expected results, although there is still a deviation value.

## 2. Research Method

In this study, for design of array antenna (1x4) we used the first method simulation with reconstruction model in experiment on figure1. The second method using sub array design for two patches with proximity –fed single transformer of quarter wave. Figure 1 is typically of right handed circularly polarized (RHCP) microstrip antenna square patch operating in S band frequency of micro satellites [9]. The structure of antenna design with using proximity coupling technique, this design has composed of two layers material substrate by use of duroid same type.

Based on, the length ( $L$ ) of the square patch antenna design required to work at frequency centre is given by equation (1) [10].

$$L = \frac{c}{2 f_c \sqrt{\epsilon_{eff}}} \quad (1)$$

Where  $c$  is the speed of light ( $3.10^8$  m / s),  $\epsilon_r$  is the dielectric constants and  $f_c$  is the center frequency (Hz).

Figure 1 shows the dimensions of the area of the substrate that is used for a width ( $W$ ) of 40 mm and a length ( $L$ ) of 60 mm [9]. The center frequency used in the design of the patch is 2.25 GHz, so the dimensions of the patch size ( $L$ ) through the equation 1 obtained 44.8 mm. The right handed circularly polarized (RHCP) characteristic influence by truncated corner on patch [10] with a side length  $S$  ( $S_1 = S_2 = S_3 = S_4 = 8.8$  mm), where bandwidth of axial ratio less than 3 dB. Addition of series stub  $50 \Omega$  on microstrip transmission line influence to matching impedance bandwidth. Dimension of the stub is width ( $w_2$ ) 4.8 mm and length ( $L_5$ ) 12.8 mm. Impedance mismatch conditions obtained when the stub disposition side of the patch at a distance ( $L_2$ ) 17.6 mm.

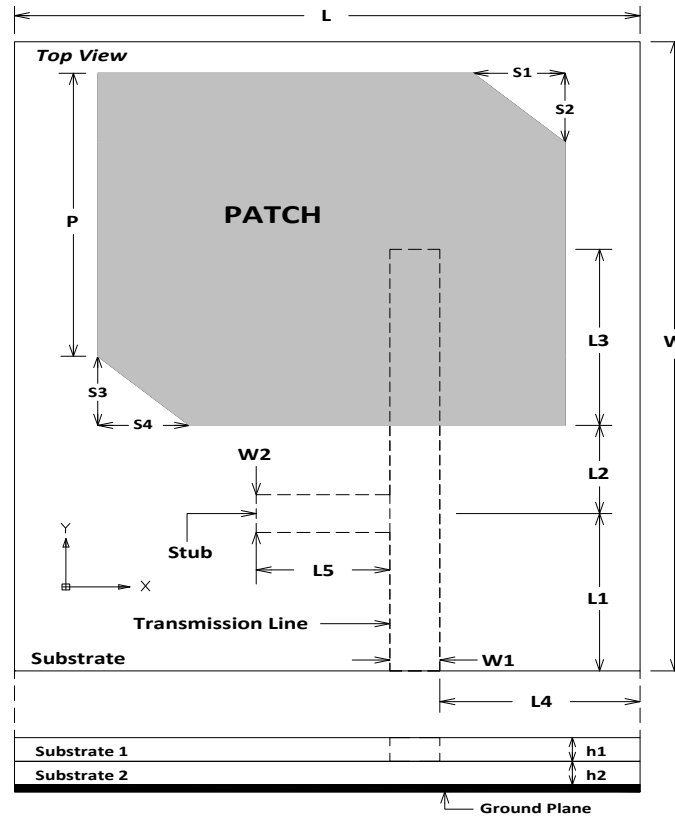


Figure 1. Design of antenna single element

Based on, characteristic impedance ( $Z_0$ ) of transmission line, where  $Z_0$  for  $w/h \geq 1$  is given by equation (2) [5,11,12]:

$$Z_0(\text{Ohm}) = \frac{[120\pi(\epsilon_{\text{eff}})^{-1/2}]}{\frac{w}{h} + 1,393 + 0,667\ln(1,444 + \frac{w}{h})} \quad (2)$$

For characteristic impedance is 50 Ohm, where  $\epsilon_{\text{eff}}$  is the effective dielectric constant obtained 1.891, so that the transmission line width ( $w_1$ ) is 4.8 mm.

In this study, the array antenna design using proximity coupling technique performed with a two-step design. The first step is to design the structure of the composition of the patch on the upper substrate layer with a linear array method. The second step is to design the structure of a microstrip transmission line using the concept of corporate feed network [5] on the substrate bottom layer. Figure 3 shows the shape of the structure of four identical patch elements separated by a distance of resonance  $3/4$  lambda for two patch elements. Antenna array has the dimensions for the size of the substrate used is 300 mm x 160 mm.

Figure 4 shows the structure of the corporate feed network transmission line on the bottom layer substrate. The feed network circuit element, there are three transformers quarter lambda. The characteristic impedance of 50  $\Omega$  for the quarter-lambda state matching transformer to a length of 24 mm. For each quarter lambda transformer impedance in the circuit of the transmission line has an impedance of 35.3  $\Omega$  [6]. While the width of the transmission line impedance of the transformer is obtained through the equation 2 is 8 mm.

For resonance obtained optimal distance between the two patches that operate at a frequency of 2.25 GHz is three-quarters of lambda or 80 mm [6]. While lambda guide obtained was 96.7 mm by equation (3).  $\lambda_g$  is the lambda guide of propagation in the microstrip transmission line. The Lambda guide ( $\lambda_g$ ) is given by equation (3) [5,11,12]:

$$\lambda_s = \frac{\lambda_0}{\sqrt{\epsilon_{eff}}} \tag{3}$$

Where,  $\lambda_0 = c/f$ ,  $c$  is the speed of light ( $3 \cdot 10^8$  m / s) and  $f$  is the operating frequency in Hertz.

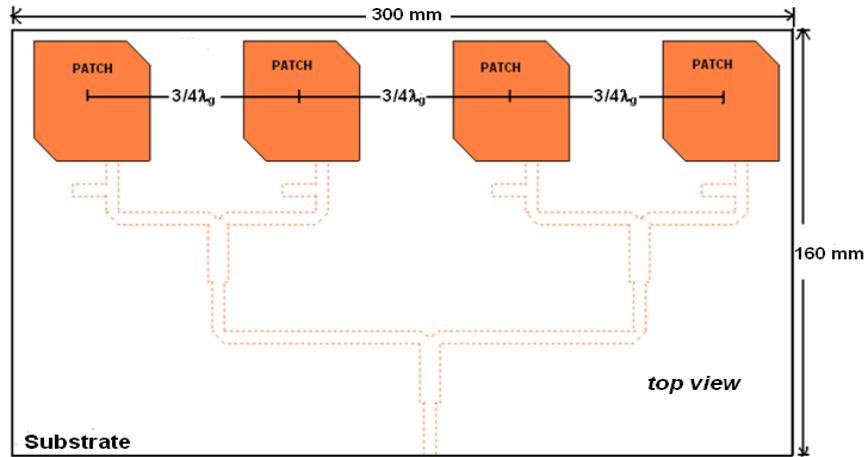


Figure 2. Design of array a patch structure

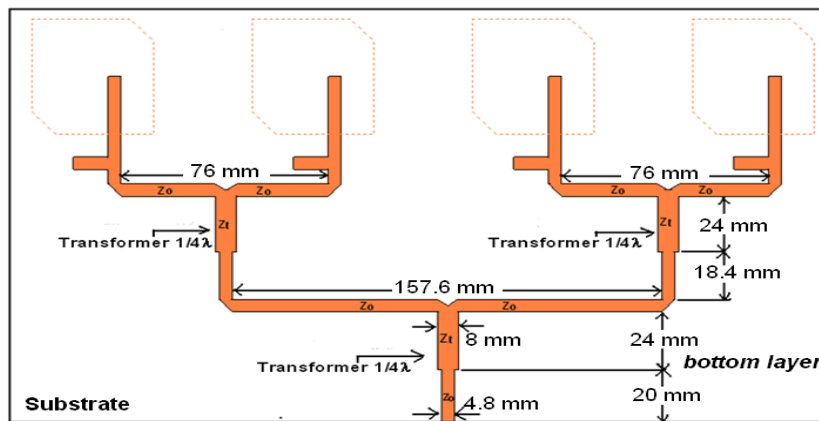


Figure 3. Design of corporate feed network transmission structure.

For impedance transformer is obtained by using equation (4) [5,11,12]:

$$Z_t = \frac{Z_0}{\sqrt{2}} \tag{4}$$

Where,  $Z_t$  is impedance transformers in Ohm,  $Z_0$  is the characteristic impedance of the microstrip transmission line.

### 3. Results and Analysis

The results of simulations and measurements of the antenna array parameters shown in figure 4 to 9. Validation of parameters antenna conducted measurement in anechoic chamber laboratory in the department of electrical engineering, Indonesia University. Figure 4



is showed graphic of return loss versus frequency of simulation and measurement. For bandwidth of return loss < -10 dB by obtained is 129.9 MHz (simulation) and 200 MHz (measurement). Center frequency of the minimum return loss obtained shifted from 2.25 to 2.29 GHz. For VSWR < 2 shows the obtained minimum VSWR is 1.19 (simulation) and 1.21 (measurement) as shown in figure 5. The results of simulation and measurement shows the bandwidth parameters obtained in the S band frequencies of micro satellite LAPAN TUBSAT.

Figure 6a shows the simulated matching impedance bandwidth of input impedance of the antenna at frequency 2.25 GHz is  $0.89264 - j0.130427\Omega$ , or about  $44.81015 - j 7.09925\Omega$ . The measurement results of the input impedance at frequency 2.28 GHz is  $55.736 + j 7.2269\Omega$  as shown in Figure 6b. This value indicates that both simulated and measured input impedance of the antenna are nearly the same as the characteristic impedance of 50  $\Omega$  transmission line. Therefore matching conditions are occurred.

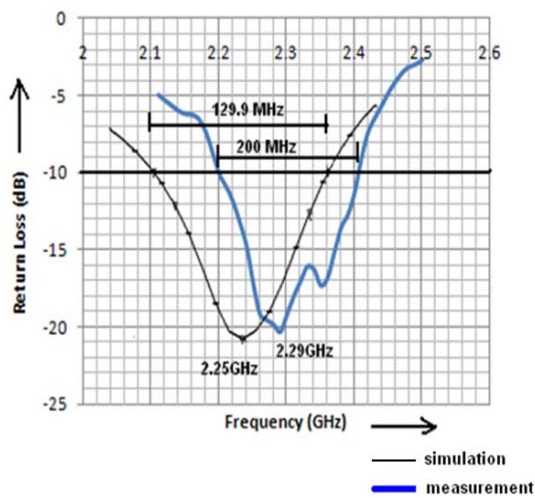


Figure 4. Return loss vs. frequency

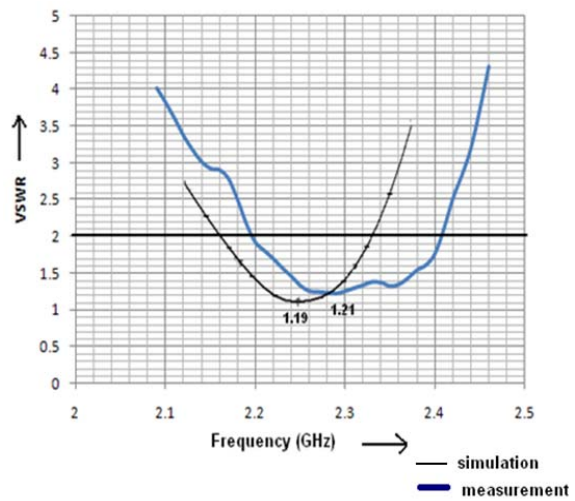


Figure 5. VSWR vs. frequency

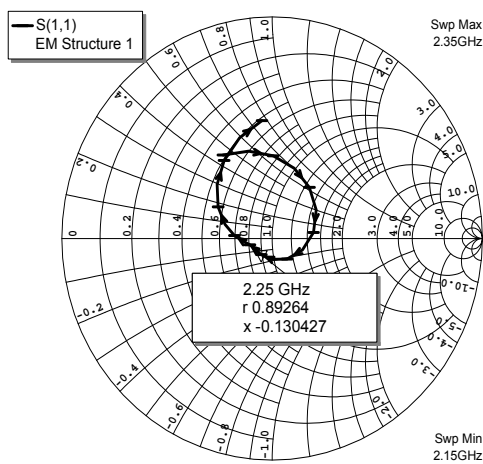


Figure 6a. Input impedance of simulation results

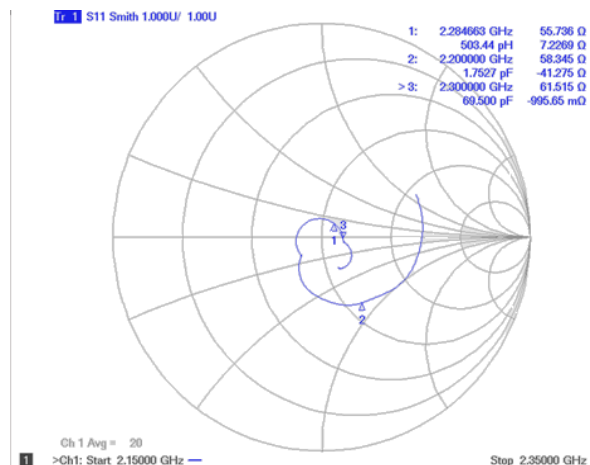


Figure 6b. Input impedance of measurement results

Figure 6. Input impedance results

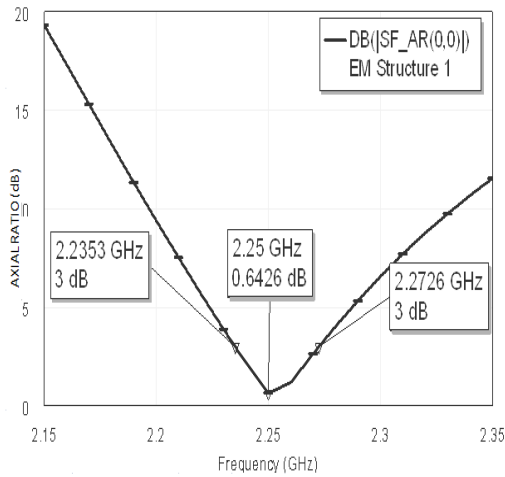


Figure 7. Axial ratio vs. frequency of simulation results

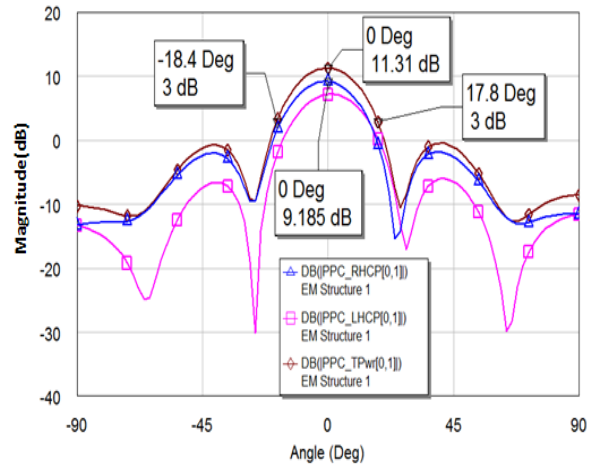


Figure 8. Polarization radiation of simulation

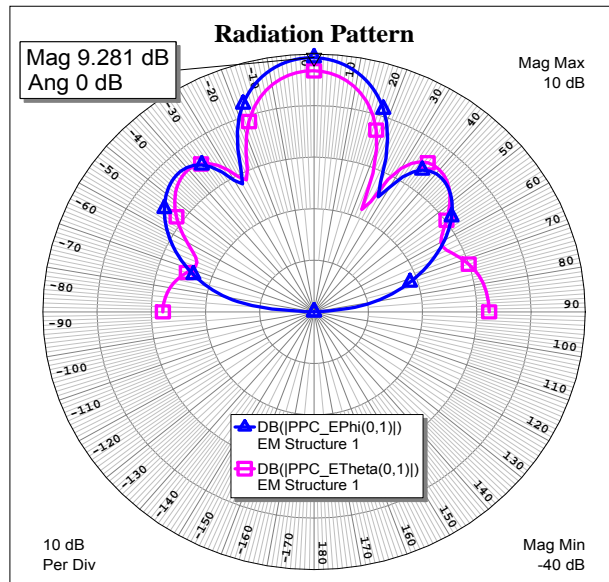


Figure 9. Radiation pattern of simulation results

Figure 7 is showed the axial ratio versus the frequency of simulation results. The target of axial ratio bandwidth of circular polarization is less than 3 dB. The bandwidth obtained (2.2353 to 2.2726 GHz) of axial ratio less than 3 dB is 37.3 MHz or 1.6% (narrowband). The axial ratio minimum obtained is 0.6426 dB at frequency 2.25 GHz. Achieving good performance to limit the size of circular polarization characteristics of the system bandwidth.

Figure 8 is showed the E field of polarization radiation of simulation results. Polarization obtained show that there are two types of polarization RHCP and left handed circularly polarized (LHCP). To obtain maximum power RHCP radiation is 9.185 dB ( $0^\circ$  angle precisely), the Half Power Beamwidth (HPBW) of total power radiation is  $36.2^\circ$  from  $-18.4^\circ$  to  $17.8^\circ$ . Figure 9 is showed of power radiation pattern of directivity simulation results. The directivity maximum of radiation pattern obtained of gain parameter of E-phi to E-Theta is 9.281dB. The target parameters are expected to gain antenna characteristics on micro satellite.

The overall results of the experimental design for parameter array antenna in accordance with expectations. In this case, a good antenna array performance based on the results of the simulations and validation through measurements in the laboratory. A prototype is

obtained from the antenna array design has a simple design structure for circular polarization characteristics as shown in Figure 11. In the manufacture of fabricated antenna using proximity coupling technique difficulty in combining the substrate layer of the patch structure with the substrate bottom layer transmission line structure. So that there is no gap between the layers necessary mounting screws on the plastic substrate plane without passing patches lines or transmission lines. Prototype antenna has dimensions of the substrate to a length of 30 cm and width of 16 cm. Part of the layers below the edge of the end of the input transmission line placed a coax-connector SMA. In the dimension size of the antenna can still be placed on the side of the plane of the satellite, where the size of the field of satellite body is 45 cm x 27 cm.

The specifics of the performance of antenna array based on simulation and measurement results shown in table 1. The performance of antenna visible for wide of bandwidth shift of 35.05% and the resonance frequency shift of 1.75% to measurement results. So it is with minimum VSWR and of input impedance experience shift to measurement result. In simulation, axial ratio bandwidth obtained narrowband characteristic and the polarization characteristics obtained dual circular polarization. So that is minimum beam width of power radiation pattern to previous experiment result.

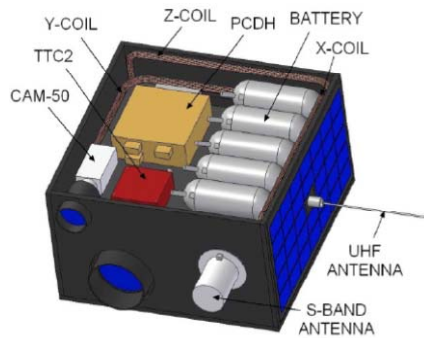


Figure 10. LAPAN TUBSAT micro satellite upper shelf [3]

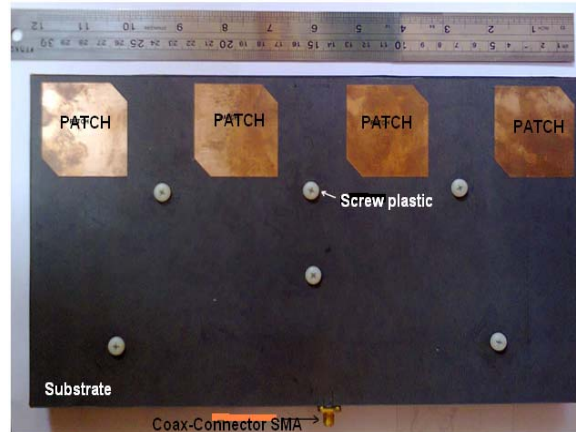


Figure 11. Prototype of antenna array design

Table 1. Parameters of Simulation and Measurement Antenna Array Results

Parameter	Simulation	Measurement
Bandwidth	129.9 MHz	200 MHz
Resonance frequency	2.25 GHz	2.29 GHz
Minimum VSWR	1.19 (2:1)	1.21(2:1)
Matching Impedance ( $Z_{in}$ )	$44.81015 - j 7.09925\Omega$	$55.736 + j 7.2269\Omega$
Axial ratio bandwidth	37.3 MHz (< 3 dB)	-
Beam width	36.2 Degree	-
Gain (Max. Directivity)	9.281 dB	-
Polarization	RHCP-LHCP	-
Impedance	50 $\Omega$	-

#### 4. Conclusion

In this paper, development for circularly polarized antenna array for micro satellite have been successfully designed and constructed as an antenna. Experimental results, the antenna is generally obtained good performance for the target parameters of the simulation and measurement results. Good performance of the antenna visible on the parameters of return loss, VSWR, Impedance Matching, gain, axial ratio and radiation pattern. For S band on micro satellite system, -10 dB return loss bandwidth is obtained above 100 MHz. Good impedance matching bandwidth for the resonant frequency of 2.25 GHz is obtained from minimum VSWR (simulation) and axial ratio bandwidth is below 3 dB(simulation). In RHCP system is obtained

when the maximum directivity (gain) of the radiation pattern of the antenna array. Although a deviation in the value parameter simulation and measurement results in table 1, but still shows the performance of the antenna in accordance with the target on LAPAN TUBSAT micro satellite system. Achievements of the size dimensions of the antenna design results still meet the target, when the prototype was placed on the satellite body.

### References

- [1] Rakhim Yuba. Development of Micro Satellite Indonesia (in Indonesia). *Online Journal of Space Communication*. Issue8: Regional Development: Indonesia. Fall.2004.
- [2] W Hasbi, E Nasser, A Rahman. Spacecraft Control Center of Lapan-Tubsat Micro Satellite. National Institute for Aeronautics and Space (LAPAN)-Indonesia.
- [3] Triharjanto, H. R, et al. LAPAN-TUBSAT. Micro-Satellite Platform for Surveillance & Remote Sensing. 4S Symp. La Rochelle, 2004. <http://www.esa.int/esapub/conference/toc/tocSP571.pdf>
- [4] JR James & PS Hall. Handbook of Microstrip Antennas. In: K Ito, T Teshirogi, S Nishimura. Circularly polarised antenna arrays. Peter Peregrinus Ltd. London. 1989; 1: 756-810
- [5] JR James, PS Hall. Handbook of Microstrip Antennas. In: RP Owens. Microstrip antenna feeds. Peter Peregrinus Ltd. London. 1989. 1: 850-854.
- [6] M Darsono. Design of Microstrip Antenna Array (1x2) Square patch Circular Polarization in S band Micro Satellite (in Indonesia). Proceeding of SMAP. University Indonesia. Depok. 2012: 27-30.
- [7] Yohandri, J T Sri Sumantyo, H Kuze. Circularly Polarized Array Antennas for Synthetic Aperture Radar. PIER Online. 2011; 7(6): 583-586.
- [8] High Frequency Laminate: Standard Thickness, Tolerances and Panel Sizes. [www.rogerscorporation.com](http://www.rogerscorporation.com)
- [9] M Darsono. Design of Microstrip Antenna Circular Polarization using Coupling Proximity Feeding Technique (in Indonesia). Proceeding of SIPTEKGAN XV. LAPAN. Banten. 2011: 553-559.
- [10] Wong KL. Compact and Broadband Microstrip Antennas. New York: John Willey & Son, 2002.
- [11] Robert E. Collin. Foundation for microwave engineering. McGraw-Hill, 2<sup>nd</sup> ed. 1992.
- [12] Kai Chang, Inder Bahl, Vijay Nair. RF and Microwave Circuit and Component Design for Wireless System. John Wiley & Son. 2002.






Office Address:  
**TELKOMNIKA Telecommunication Computing Electronics and Control**  
**Kampus III UAD - Jl. Prof. Soepomo Janturan Yogyakarta 55164**

Phone: +62274-902015, 511828, 511830, 579418, 571126, Fax: +62274-904004  
Website: <http://telkomnika.uad.ac.id>, email: [telkomnika@uad.ac.id](mailto:telkomnika@uad.ac.id)

ISSN 1693-6930



9 771693 693107 >