



# SINERGI

p-ISSN: 1410-2331 e-ISSN: 2460-1217  
VOL. 27, NO. 3, OCTOBER 2023

Scopus Indexed Journal

Accredited **SINTA 1** by KEMENDIKBUDRISTEK, Decree No: 79/E/KPT/2023



**SINERGI**

**VOL. 27**

**NO. 3**

**PAGES  
289-466**

**OCTOBER 2023**

**p-ISSN: 1410-2331  
e-ISSN: 2460-1217**



- Editor in Chief** : Prof. Dr. Andi Adriansyah (UMB, Indonesia)
- Editorial Board** :
- Prof. Dr. Chenwei Deng (Beijing Institute of Technology, China)
  - Prof. Dr. Makbul Anwari (King Abdul Aziz Univ., Saudi Arabia)
  - Prof. Dr.-Ing Mudrik Alaydrus (UMB, Indonesia)
  - Prof. Dr. Muji Setiyo (UNIMMA, Indonesia)
  - Prof. Dr. Nangkula Utaberta (UCSI University, Malaysia)
  - Assoc. Prof. Dr. Ahmad Fithriady (UMT, Malaysia)
  - Assoc. Prof. Dr. Ahmed Turan Ozdemir (Erviyes Univ., Turkey)
  - Assoc. Prof. Dr. Hasliza A. Rahim (UniMAP, Malaysia)
  - Assoc. Prof. Dr. Mahadzir Ishak (UMP, Malaysia)
  - Assoc. Prof. Dr. Rini Akmeliawati (Univ. of Adelaide, Australia)
  - Dr. Acep Hidayat (UMB, Indonesia)
  - Dr. Agab Bakheet Mohammednour (Al-Neelain University, Sudan)
  - Dr. -Ing. Darwin Sebayang (UMB, Indonesia)
  - Dr. Denny Setiawan (Kementrian Kominfo RI, Indonesia)
  - Dr. -Ing. Galih Bangga (Univ. of Stuttgart, Germany)
  - Dr. Ghaida Muttashar Abdulsahib (Univ. of Technology, Iraq)
  - Dr. Hatsari Mitsudharmadi (Abu Dhaby Polytechnic, UAE)
  - Dr. Jae Hyun Yun (Sungkyunkwan Univ., Republic of Korea)
  - Dr. Muchamad Oktaviandri (Universitas Bung Hatta, Indonesia)
  - Dr. Osamah Ibrahim Khalaf (An-Nahrain University, Iraq)
  - Dr. Rosyida Permatasari (Universitas Trisakti, Indonesia)
  - Dr. Setiyo Budiyanto (UMB, Indonesia)
  - Dr. Sunday Ayoola Oke (University of Lagos, Nigeria)
  - Dr. Teguh Prakoso (Universitas Dipenogoro, Indonesia)
  - Dr. Zulfa Fitri Ikatrinasari (UMB, Indonesia)
- Editorial Staff** :
- Yananto Mihadi Putra
  - Mega Avianti
- Editorial Address** :
- Fakultas Teknik Universitas Mercu Buana  
Jl. Raya Meruya Selatan, Kembangan, Jakarta 11650  
Tlp/Fax: 021-5871335  
<http://www.publikasi.mercubuana.ac.id/index.php/sinergi>
- 

**SINERGI** is a peer-reviewed journal published three times a year in February, June and October. The journal is published by Faculty of Engineering, Universitas Mercu Buana. Each publication contains articles comprising high quality theoretical and empirical original research papers, review papers, and literature reviews that are closely related to the fields of Engineering (Mechanical, Electrical, Industrial, Civil and Architecture). The theme of paper is focused on new industrial applications and energy development that synergized with local, green and sustainable technologies.



---

## Reviewers

- Prof. Dr. Eng. Ahmed Khadim Hussein (University of Babylon, Iraq)  
Prof. Dana Santoso, PhD (BRI Institute, Indonesia)  
Prof. Dr. -Ing. Mudrik Alaydrus (Universitas Mercu Buana, Indonesia)  
Prof. Dr. Awaluddin M. Shahrourun (Universitas Islam Madinah, Saudi Arabia)  
Prof. Dr. Muhammad Khairuddin (Universitas Negeri Yogyakarta, Indonesia)  
Prof. Dr. Zaharuddin Mohamed (Universiti Teknologi Malaysia, Malaysia)  
Assoc. Prof. Dr. Azriyenni Azhari Zakri (Universitas Riau, Perancis)  
Assoc. Prof. Dr. Setyawan Widyarto (Universitas Selangor Malaysia, Malaysia)  
Assoc. Prof. Dr. Wahyu Mulyo Utomo (UTHM, Malaysia)  
Dr. Abdusy Syarif (Universitas of Haute Alsace, Perancis)  
Dr. Ade Asmi (Universitas Bakrie, Indonesia)  
Dr. Agung Purniawan (Institut Teknologi Sepuluh November, Indonesia)  
Dr. Amirullah (Universitas Bhayangkara Surabaya, Indonesia)  
Dr. Anton Yudhana (Universitas Ahmad Dahlan, Indonesia)  
Dr. Arien Heryansyah (Institut Pertanian Bogor, Indonesia)  
Dr. Arif Irwansyah (Electronic Engineering Polytechnic of Surabaya, Indonesia)  
Dr. Abdullah Dahlan (Universitas Malikussaleh, Indonesia)  
Dr. Devi Fitriana (Universitas Mercu Buana, Indonesia)  
Dr. Dini Rosmalina (Universitas Pancasila, Indonesia)  
Dr. Dwi Agustina Kurniawati (Universitas Islam Negeri Sunan Kalijaga, Indonesia)  
Dr. E. Erwin (Universitas Sriwijaya, Indonesia)  
Dr. Herry Agung Prabowo (Universitas Mercu Buana, Indonesia)  
Dr. I Made Wiwit Kastawan (State Polytechnic of Bandung, Indonesia)  
Dr. Iswadi Hasyim Rosma (Universitas Riau, Indonesia)  
Dr. Kontan Tarigan (Universitas Mercu Buana, Indonesia)  
Dr. Muhammad Abdillah (Universitas Pertamina, Indonesia)  
Dr. Muhammad Ikhsan Setiawan (Universitas Narotama, Indonesia)  
Dr. Muhammad Syarif Hidayat (Universitas Mercu Buana, Indonesia)  
Dr. Munawar Agus Riyadi (Universitas Diponegoro, Indonesia)  
Dr. Nunung Widyaningsih (Universitas Mercu Buana, Indonesia)  
Dr. Rini Nur Hasanah (Universitas Brawijaya, Indonesia)  
Dr. Eng. Rudi Kurnianto (Universitas Tanjungpura, Indonesia)  
Dr. Satria Mandala (Telkom University, Indonesia)  
Dr. Sally Cahyati (Universita Trisakti, Indonesia)  
Dr. Syahril Ardi (Politeknik Manufaktur Astra, Indonesia)  
Dr. Yusnita Rahayu (Universitas Riau, Indonesia)  
Dr. Yudhi Gunardi (Universitas Mercu Buana, Indonesia)  
Dr. W. Waluyo (Institut Teknologi Nasional, Indonesia)

---

**SINERGI** is a peer-reviewed journal published three times a year in February, June and October. The journal is published by Faculty of Engineering, Universitas Mercu Buana. Each publication contains articles comprising high quality theoretical and empirical original research papers, review papers, and literature reviews that are closely related to the fields of Engineering (Mechanical, Electrical, Industrial, Civil and Architecture). The theme of paper is focused on new industrial applications and energy development that synergized with local, green and sustainable technologies.



## TABLE OF CONTENTS

<p><b>A review towards Friction Stir Welding technique: working principle and process parameters</b></p> <p>Rikko Putra Youlia, Diah Utami, Dedik Romahadi, Yang Xiawei          Department of Materials Processing Engineering, School of Materials Science and Engineering, Northwestern Polytechnical University, China          Department of Industrial Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia          Department of Mechanical Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia</p>	289-308
<p><b>Optimization of Ultra-Wideband bandwidth for the design of microstrip monopole antennas using Defected Ground Structure and star-shaped patche</b></p> <p>M. Darsono, Muhammad Rega          Department of Electrical Engineering, Faculty of Engineering, Universitas Dharma Persada, Indonesia</p>	309-318
<p><b>Performance analysis of a single-cylinder type steam turbine with a capacity of 3.5 mw using enthalpy drop method</b></p> <p>Bagus Adi Saputra, Nurato          Department of Mechanical Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia</p>	319-326
<p><b>Mini air conditioning design with two levels of thermoelectric cooler module: cooling heat pipe</b></p> <p>Irwin Bizzy, Darmawi, Agung Mataram, Fadhil Fuad Rachman          Department of Mechanical Engineering, Faculty of Engineering, Universitas Sriwijaya, Indonesia          Department of Industrial Engineering, Faculty of Engineering, Universitas Muhammadiyah Palembang, Indonesia</p>	327-332
<p><b>Project managers competency on project performance of green toll road development project in Indonesia</b></p> <p>Mairizal, Rahmat Alifiardi, Gilang Ardi Pratama, Mohd Zaimi Abd Majid, Shek Poi Ngian          School of Civil Engineering, Faculty of Engineering, Universiti Teknologi Malaysia, Malaysia          Department of Industrial Engineering, Faculty of Engineering, Universitas Pamulang, Indonesia          Department of Civil Engineering, Faculty of Civil Engineering and Design, Universitas Bung Hatta, Indonesia          Department of Civil Engineering &amp; Environment, Faculty of Engineering, Universitas Indonesia, Indonesia</p>	333-342
<p><b>Image Segmentation in Aerial Imagery: A Review</b></p> <p>Ade Purwanto, Dewi Habsari Budiarti, Mukti Wibowo, Irfansyah Yudi Tanasa, Yomi Guno, Aris Surya Yunata, Asyraf Hidayat, Fithri Nur Purnamastuti, Dede Dirgahayu          National Research and Innovation Agency (BRIN), Indonesia</p>	343-360
<p><b>The model selection of propeller turbine construction using Analytical Hierarchy Process (AHP)</b></p> <p>Dedi Wardianto, Mafrizal, Sufiyanto, Rudi Kurniawan Arief, Herry Agung Prabowo, Irfan Hilmy          Department of Mechanical Engineering, Faculty of Engineering, Institut Teknologi Padang, Indonesia</p>	361-370

- Department of Mechanical Engineering, Faculty of Engineering, Sekolah Tinggi Teknologi Nasional, Indonesia  
 Department of Mechanical Engineering, Faculty of Engineering, Universitas Muhammadiyah Sumatera Barat, Indonesia  
 Department of Magister of Industrial Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia  
 Department of Mechanical Engineering, Faculty of Engineering Technology and Science, Higher College of Technology, UAE
- Study of design criteria for the Ayung River estuary area as an urban riverfront park in Denpasar City, Bali** 371-382  
 I Made Agus Dharmadiatmika, Kadek Edi Saputra, Naniek Kohdrata, Hinako Yamagami  
 Study Program Landscape Architecture, Agriculture Faculty, Udayana University, Indonesia.  
 Global Science Studies, Yamaguchi University, Japan
- Proposed model and strategy for Indonesian higher education facing technological disruption and Industrial Revolution 4.0 using Newton's Laws analogy** 383-392  
 Erkata Yandri, Sparisoma Viridi, Rizal F. Hariadi  
 Graduate School of Renewable Energy, Darma Persada University, Indonesia  
 Department of Physics, Faculty of Mathematics and Natural Sciences, Institut Teknologi Bandung, Indonesia  
 Department of Physics, Arizona State University, US
- The impacts of 5D-Building Information Modeling on construction's Time and cost performance** 393-404  
 Hedy Herdyana, Agus Suroso  
 Department of Civil Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia
- Application of Capacity Spectrum Method (CSM) for non-symmetrical reinforced concrete high-rise buildings as a tool for seismic design** 405-414  
 Ayuddin, K. R. Bindhu  
 Department of Civil Engineering, Faculty of Engineering, Universitas Negeri Makassar, Indonesia  
 Department of Civil Engineering, Faculty of Engineering, College of Engineering Trivandrum, India
- Fabrication of mercury (Hg) sensor based on Tire Waste (TW) carbon electrode and voltammetry technique** 415-422  
 Baihaqi, Khairi Suhud, Sagir Alva, Eka Safitri, Julinawati, Binawati Ginting, Syafrizal Fonna, Ahmad Kamal Arifin, Zulnazri Zulnazri, Nurul Islami  
 Department of Chemistry, Mathematics and Natural Science Faculty, Universitas Syiah Kuala, Indonesia  
 Department of Mechanical Engineering, Faculty of Engineering, Universitas Mercu Buana, Indonesia  
 Mechanical Engineering and Industrial Engineering Department, Engineering Faculty, Universitas Syiah Kuala, Indonesia  
 Centre of Integrated Design for advanced Mechanical System (PRISMA), Universiti Kebangsaan Malaysia, Malaysia  
 Chemical Engineering Department Universitas Malikussaleh, Indonesia  
 Material Engineering Department Universitas Malikussaleh, Indonesia
- Using Particle Swarm Optimization for Power System Stabilizer and energy storage in the SMIB system under load shedding conditions** 423-432  
 Mansur Mansur, Muhammad Ruswandi Djalal  
 Department of Electrical Engineering, Halu Oleo University, Indonesia  
 Department of Mechanical Engineering, State Polytechnic of Ujung Pandang, Indonesia
- Modeling and implementing a load management system for a solar home system based on Fuzzy Logic** 433-442  
 Makmur Saini, Muhammad Ruswandi Djalal, Muhammad Azhar, Golda Evangelista Patrix  
 Energy Powerplant Study Program, Department of Mechanical Engineering, Politeknik Negeri Ujung Pandang, Indonesia

- Good Manufacturing Practice (GMP) in Tofu MSMEs in North Aceh** 443-450  
Cut Ita Erliana, Iskandar Hasanuddin, Yuwaldi Away, Raja Ariffin Raja Ghazilla5  
Doctoral Program, School of Engineering, Universitas Syiah Kuala, Indonesia  
Department of Industrial Engineering, Universitas Malikussaleh, Indonesia  
Department of Mechanical and Industrial Engineering, Universitas Syiah Kuala,  
Indonesia  
Department of Electrical and Computer Engineering, Universitas Syiah Kuala,  
Indonesia  
Department of Mechanical Engineering, Faculty of Engineering, Universiti Malaya,  
Malaysia
- Optimized Swarm Enabled Deep Learning Technique for Bone Tumor Detection  
using Histopathological Image** 451-466  
Dama Anand, Osamah Ibrahim Khalaf, Fahima Hajje, Wing-Keung Wong, Shin  
Hung Pan, Gogineni Rajesh Chandra  
Department of Department of Computer Science, Koneru Lakshmaiah Education  
Foundation, India.  
Department of Solar, Al-Nahrain Research Center for Renewable Energy, Al-  
Nahrain University, Iraq  
Department of Information Systems, College of Computer and Information  
Sciences, Princess Nourah bint Abdulrahman  
University, Saudi Arabia  
Asia University, Taiwan  
Department of Department of Computer Science, KKR & KSR Institute of  
Technology and Sciences, India





## Optimization of Ultra-Wideband bandwidth for the design of microstrip monopole antennas using Defected Ground Structure and star-shaped patches

**M. Darsono\* and Muhammad Rega**

Department of Electrical Engineering, Faculty of Engineering, Universitas Dharma Persada, Indonesia

### Abstract

*This paper presents a design of a monopole microstrip antenna developed to support Ultra-wideband (3.1 -10.6 GHz) technology wireless communication systems. An antenna with minimalist dimensions operates on C-Band (wireless LAN) and X-Band (downlink satellite) frequencies. The antenna profile has a star shape patch on the top side and the use of the Defected Ground Structure (DGS) technique on the bottom side on RT DUROID substrate media. The design uses a simulation method using software and measurement tests on antenna prototypes to obtain parameters and antenna performance characteristics. The results of the measurement test, the bandwidth return loss < -10 dB has a difference of 40% (absolute) and 0.7% (Fractional) lower than the simulation when VSWR < 2. The radiation pattern forms an omnidirectional with a maximum directivity (Gain) of 5.18dBi with polarization vertical. Overall, the UWB monopole antenna design results have a low profile, compact, small size, and support mobile communication devices.*

*This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license*



### Keywords:

Antenna;  
DGS;  
Simulation;  
Star Patch;  
UWB;

### Article History:

Received: September 6, 2022  
Revised: February 20, 2023  
Accepted: April 13, 2023  
Published: October 2, 2023

### Corresponding Author:

M. Darsono  
Department of Electrical  
Engineering, Faculty of  
Engineering, Universitas Dharma  
Persada, Indonesia  
Email:  
[em\\_darsono@ft.unsada.ac.id](mailto:em_darsono@ft.unsada.ac.id)

### INTRODUCTION

The Antenna is a transducer designed to transmit or receive electromagnetic waves. Microstrip antennas have several advantages over conventional microwave antennas and are therefore widely used in many practical applications. On February 14, 2002, the Federal Communications Commission (FCC) amended the Part 15 rules which govern unlicensed radio devices to include the operation of Ultra-Wideband (UWB) devices. The FCC also allocated a bandwidth of 7.5GHz, i.e., from 3.1GHz to 10.6GHz to UWB applications, by far the largest spectrum allocation for unlicensed use the FCC has ever granted [1].

On December 15, 2004, the FCC issued its Second Report on UWB. This report allows for greater flexibility in the introduction of massive systems and devices that do not satisfy the definition of UWB technology. The amended legislation raises the peak emission power limits

of wide-bandwidth devices to the same level as UWB devices in the three formerly unlicensed frequency bands, namely 5925-7250 MHz, 16.2-17.2 GHz, and 23.12-29 GHz. The availability of various services in narrow bands, such as Wireless LAN (WLAN) in the 5.15 to 5.85 GHz frequency region, X-region satellite downlink communication in the 7.1 to 7.6 GHz band, and Direct Communication, is the main issue with UWB antennas. Broadcast Satellite (DBS) operates in the frequency range of 11.7 to 12.5 GHz [2]. This results in electromagnetic interference problems in the UWB system [3, 4, 5].

UWB antennas have their charms and challenges in their design, according to the FCC, as a crucial component of the UWB system for wireless communication. As a crucial component of the UWB system, UWB antennas must have a compact size, lightweight, omnidirectional radiation pattern, and all other properties required

for UWB communication. As a result, there is a lot of interest in UWB technology research and development [6, 7, 8, 9].

Figure 1 UWB technology is appropriate for a wide range of applications, including communications, geo-location, positioning, and radar or sensor applications. The UWB system has advanced technologically for more than 40 years [2].

According to the Shannon-Hartley theorem, channel capacity in this system improves linearly as bandwidth increases and declines logarithmically when the signal-to-noise ratio (SNR) diminishes[10]. UWB technology's power is incredibly low and close to the noise level. As a result, the UWB system is power limited rather than band-restricted, as in the narrowband situation [2][11].

Several designs have been published to achieve the UWB frequency band, including the genetic algorithm, rectangular slot, round diamond, trident form bait, Quasi-self-free, Vivaldi antipodal, and many others. Ultra-wideband (UWB), a radio transmission method with a bandwidth surpassing 500MHz or at least 20% of the central frequency, is a game-changing approach for short-range high-bandwidth wireless communication [3][10].

The design of a compact ultra-wideband antenna printed on short-range radio devices plays an important part in current wireless communications in recent RF communications and remote sensing applications at radio, microwave, and terahertz frequencies. It is a short-range communications technique that uses no carriers and transfers data in the form of very short pulses [2][7].

Several works that have examined UWB microstrip antennas with the usage of star patches as slits or radiating patches have demonstrated good values with the support of specific grounding models [12][13]. The grounding model or technique is critical for obtaining a wide bandwidth. This criterion heavily relies on fractal geometry.

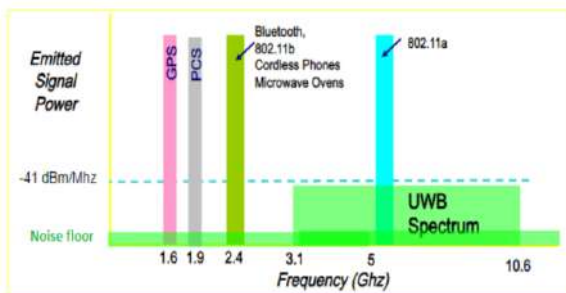


Figure 1. UWB versus other Radio Communication Systems [2]

Because fractals have non-integral dimensions, their propensity to fill space can be exploited to reduce antenna size [14]. The Method of the Moment analysis technique is used to optimize the outcomes by the design goal.

Microstrip antenna development that optimizes bandwidth can be performed through the use of techniques such as coupling proximity, Electromagnetic Band Gap (EBG), and Defected Ground Structure (DGS). In this study, the Electromagnetic Band Gap method, which is most commonly used at UWB frequencies, was used. At a specific frequency range, electromagnetic waves flow through the EBG, a periodic structure. On the ground plane construction, which is located at the center point, the notched band technique is applied. There are several methods for obtaining notch bands, including [14][15].

**METHOD**

The goal of the antenna design study is to create a simple, compact monopole antenna model that can operate in the UWB frequency spectrum. Using the Defected Ground Structure approach, obtain bandwidth optimization on the outcomes of the antenna design performance. Rogers-Corp RT DUROID 5880 substrates have a dielectric constant of 2.2, a thickness of 1.57mm, and a loss tangent of 0.002 [17].

In this study, a simulation model was run using moment application software to generate data from an overall antenna design. The goal of this research was to develop a microstrip antenna prototype that might be employed in wireless communication applications. The was created to be small and low-profile.

**Antenna Design**

Magnetic coupling technology is used in the antenna design of the EBG method's planar monopole antenna. The patch is built on the top layer of the substrate material in the opposite orientation as the ground plane. A particular star-shaped patch is made using two equilateral triangular patches.

In this, a star-shaped patch is made by fusing two triangles and rotating the angle by 180 degrees Figure 2 and Figure 3 [18].




Figure 2. Triangular patch merge direction.






Figure 3. Star Patch

The basic shape of the star patch is formed by two triangular patches. Crosswise, the two triangular patches are 180 degrees apart. The equilateral triangular patch's shape can be determined by calculating the side lengths of the patch. The dimensional value determines the resonance substrate material's resonance frequency and dielectric constant are order modes in the Transverse Magnetic Wave Propagation ( $TM_{mn}$ ) dominating mode. To determine the triangle's side length, apply (10) [17][18].

$$fr_{mn} = \frac{2C}{3a\sqrt{\epsilon_r} \mu_{eff}} \sqrt{(n^2 + nm + m^2)} \quad (1)$$

Where  $f_r$  is the relative dielectric constant of the material,  $\epsilon_{eff}$  is the dielectric material's effective permittivity, and  $f_r$  is the resonant frequency in gigahertz. The speed of light is known as  $C$  ( $3 \times 10^8$  m/s).  $m = 1$  and  $n = 0$  in the case of the dominant mode ( $TM_{01}$ ). As shown below, (2) is generated by lowering (1).

$$fr = \frac{2C}{3a\sqrt{\epsilon_r}} \quad (2)$$

The following equation can be used to calculate the length of the triangle's side ( $a$ ).

$$a = \frac{2C}{3f_r\sqrt{\epsilon_r}} \quad (3)$$

### The Star Patch Design

To determine the dimension value of the star patch, begin with an equilateral triangle-shaped patch. The operating range of UWB technology is 3.1 GHz to 10.6 GHz, which includes the C and X band frequencies. The resonance frequency ( $f_r$ ) or core frequency in the current study is 6.5 GHz, and the thickness ( $h$ ) and dielectric constant ( $\epsilon_r$ ) of the RT DUROID substrate are 1.57 mm and 2.2, respectively.

The side length of the triangle patch may be calculated using (3), and the result is 20 mm with a 60-degree angle on each side, as shown in Figure 4. The size of the star patch created by joining two equilateral triangles is seen in Figure 5.

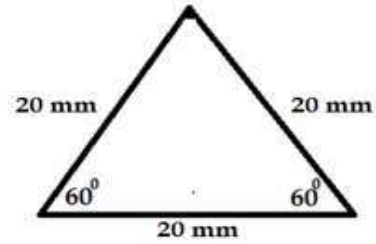


Figure 4. Triangular patch design

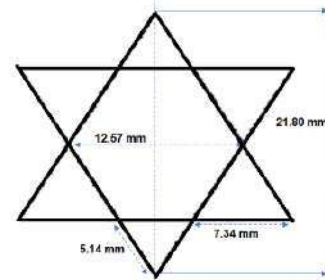


Figure 5. Star patch design

The diagonals of the star angles in the figure's two long sides are 12.57 mm and 21.8 mm. Two sides with lengths of 5.14 mm and 7.34 mm make up the corner of the triangle's junction.

### Transmission Line

The microstrip transmission line is part of the antenna design element that functions as a power supply. The characteristic impedance of the microstrip transmission line can be calculated by analyzing the width of the line above the conductor's surface to the thickness of the substrate material. Figure 6 shows a profile of a microstrip transmission line depending on the value of the conductor width ( $w$ ) and the thickness ( $h$ ) of the substrate layer.

The medium or substrate type requirements define a microstrip transmission line's characteristic impedance ( $Z_0$ ). When the line width ( $w$ ) to substrate thickness ( $h$ ) ratio is greater than one ( $w/h > 1$ ), then (4) can be used to calculate the characteristic impedance of the microstrip line [19][20].

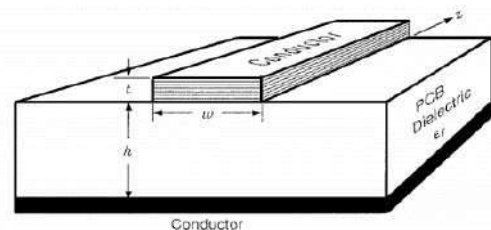


Figure 6. Microstrip line

$$Z_0 = \frac{[120\pi\sqrt{\epsilon_{eff}}]}{\frac{h}{w} + 1,393 + 0,667\ln(1,444 + \frac{w}{h})} \quad (4)$$

Where  $Z_0$  is the characteristic impedance in Ohms,  $\epsilon_{eff}$  is the material's relative dielectric constant, the substrate thickness is in meters, and  $w$  is the transmission line width in meters. Using (4), we can calculate that the transmission line width is 4.8 mm when the characteristic impedance ( $Z_0$ ) is  $50\Omega$ .

**T-Junction Power Divider**

For this research, the microwave transmission line as a power supply point to a loaded patch the T-junction power divider transmission line technique is used. T-junction microstrip is a technique of several types of microstrips in system telecommunication. A tapered microstrip is often found as a power separator also known as a splitter. The T-Junction power divider circuit shown in Figure 7 is a common design for microstrip antennas, where its performance is comparable to that of the three-port Wilkinson power divider [22]. The impedance value of the circuit is made up of three fundamental components: an input line ( $Z_0$ ), two output lines ( $Z_1$ ), and ( $Z_2$ ). There is no isolation between the output ports so other than at the T-junction [23].

The third transmission line impedance relationship of the T-junction power divider is as follows:

$$\frac{1}{z_0} = \frac{1}{z_1} + \frac{1}{z_2} + jB \quad (5)$$

Where  $Z_0$  is the input line's characteristic impedance,  $Z_1$ , and  $Z_2$  are the output lines' characteristic impedances, and  $B$  is the reactance formed at the junction of the three lines. As a result, given an input impedance, the two output impedances can be matched to it. Furthermore, if  $B$  (imaginary side) is assumed to be zero, the value of the characteristic impedance of all becomes real. So, using (6), we established a relationship value for the three impedances of  $Z_0$ ,  $Z_1$ , and  $Z_2$  [21][24].

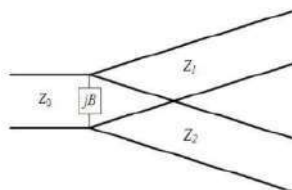


Figure 7. T-Junction Power Divider [23]

$$\frac{1}{z_0} = \frac{1}{z_1} + \frac{1}{z_2} \quad (6)$$

If the characteristic impedance ( $Z_0$ ) in (4) is  $50\Omega$ , then the output line impedances ( $Z_1$  and  $Z_2$ ) are  $100\Omega$ , respectively. As an outcome, the impedance of  $Z_1$  and  $Z_2$  has a 1.4 mm line width in the design of the microstrip transmission line.

**Defected Ground Structure (DGS) Design**

This technique merely denotes the placement of a "defect," which is sometimes considered an approximate approximation of an infinite, perfectly conducting current sink, in the plane's ground. Although the additional DGS perturbations modify the homogeneity of the ground plane, they do not cause it to be defective. The main component of DGS is a resonant gap or slot in the ground metal positioned precisely beneath a transmission line and angled for effective coupling to the line. DGS can be used as a filter in antennas operating in the UWB spectrum to reduce interference effects [14, 15, 24].

This is the most common usage of DGS for the Antenna because it can reduce side lobes in phase arrays, improve the performance of couplers and power dividers, and minimize the response to band signals for both transmit and receive [26][27]. This study employs different square-type forms as part of the DGS technique. The geometry of the DGS construction using a microstrip antenna's ground plane is depicted in Figure 8.  $L_g$  and  $W_g$  are the length and width of the ground plane on the DGS side of the construction, respectively. For a notch the same size as the ground plane's opening ( $G_p$ ) [28, 29, 30].

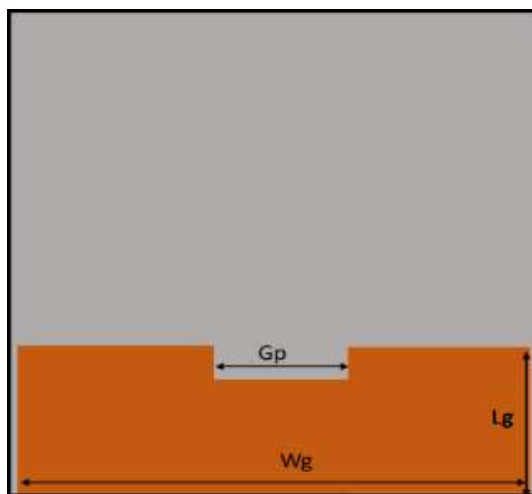


Figure 8. The ground plane's DGS

### RESULTS AND DISCUSSION

Results for antenna design were obtained in this work using the simulation method. Two things may be seen from the simulation results: the antenna configuration's form and the Antenna's parameters. With a length and width of 40 millimeters for the first result, the substrate material has the smallest possible dimensions. The investigation of the Antenna's performance parameters follows, including measurements of bandwidth, VSWR, input impedance, radiation pattern, gain, and so forth.

Figure 9 shows the antenna design's front view structure, with the star patch and transmission line structure. Table 1 displays the results of the antenna design configuration in two components. The radiating patch, which is directly connected to the transmission line's source of power, is shown in the picture as a small antenna modeling design. The substrate material used for antenna modeling is required with a length ( $L_s$ ) and width ( $W_s$ ) of 40 mm x 40 mm. A transmission line with a characteristic impedance of  $50 \Omega$  is designed with a length ( $L_t$ ) of 7. Millimeters and a width millimeters8 millimeters. Furthermore, the T-Junction power divider circuit has two output transmission lines with a gap (GD) of 11 millimeters with a line length (LD) of 10 millimeters and each has an impedance of  $100 \Omega$ (WD).

The lower layer of the ground plane is designed in Figure 10 using the DGS technique, and Table 2 explains the ground plane's dimensions. The ground plane area is limited to a width ( $W_g$ ) of 38 millimeters and a length ( $L_g$ ) of 12.2 millimeters.

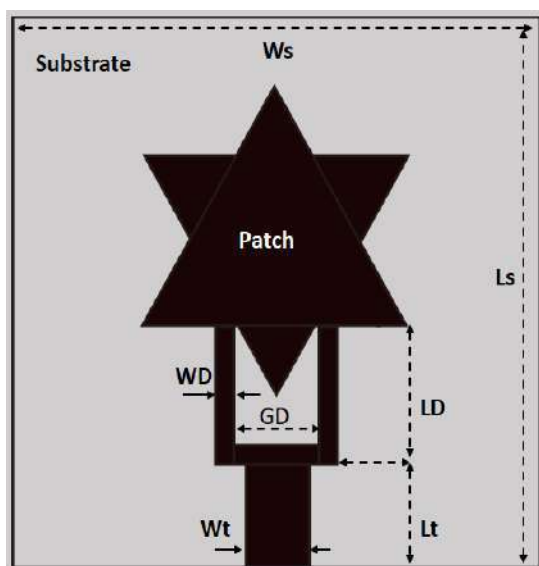


Figure 9. Design of Antenna top view.

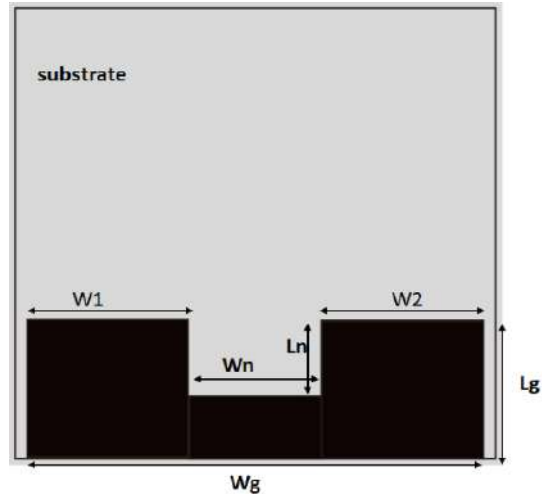


Figure 10. Design of Antenna bottom view.

Table 1. Dimension of Antenna top view.

Symbol	Dimension	Size (millimeter)
$W_s$	Width of Substrate	40
$L_s$	Length of Substrate	45
$W_t$	Width of the transmission line	4.8
$L_t$	Length of Transmission line	7.4
WD	Width of the output line power the power divider	1.4
GD	The gap between two output line power dividers	11
LD	Length of the output line power divider	10

Table 2. Dimension of Antenna bottom view

Symbol	Dimension	Size (millimeter)
$W_g$	The ground plane's width	38
$L_g$	The ground plane's length	12.2
$W_1=W_2$	Size of the ground's void between the left and rig.	13.5
$W_n$	Ground plane notch width	11
$L_n$	Ground plane notch length	6.5

The notch field has a slit width ( $W_n$ ) of 11 millimeters and a length ( $L_p$ ) of 5 millimeters, where the width of the slit to the edge ( $W_1 = W_2$ ) of the ground plane is 13.5 millimeters each.

#### Parameters S11

The frequency limit on return loss, as shown in Figure 11 and Figure 12, is used to determine the bandwidth parameter S11. Figure 11 shows the simulation results of the return loss graph versus frequency. The bandwidth of return loss is below -10 dB from 2.1573 GHz (marker1) to 8.7247 GHz (marker4). The results of fractional bandwidth analysis are 1.2% and the absolute bandwidth is 6.5674 GHz. While the measurement results are shown in Figure 12, the graph of return loss on frequency shows the lowest frequency range is 5.84 GHz (marker 2)

and the highest frequency is 9.76 GHz (marker 3). The results of fractional bandwidth analysis are 0.5% and the absolute bandwidth is 3.92 GHz. Bandwidth optimization from simulation to measurement with a difference of 0.7% (fractional) or 2.647 GHz (absolute).

Bandwidth impedance matching can be seen in the VSWR (voltage standing wave ratio) value, where the value limit is 1 to 2. The simulation results and measurements of VSWR values can be seen in Figure 13 and Figure 14.

Figure 13 shows the VSWR graph versus the frequency of the simulation results, where impedance matching at the frequency 5.796 GHz when the VSWR is 1.0098 (marker 2) and at 8.161 GHz when the VSWR is 1.2 (marker 3). While the results of the VSWR measurements are shown in Figure 14, where the impedance matches at the 5.84 GHz frequency when the VSWR is 1.147 (marker 2) and at the 9.76 GHz frequency when the VSWR is 1.8 (marker 3).

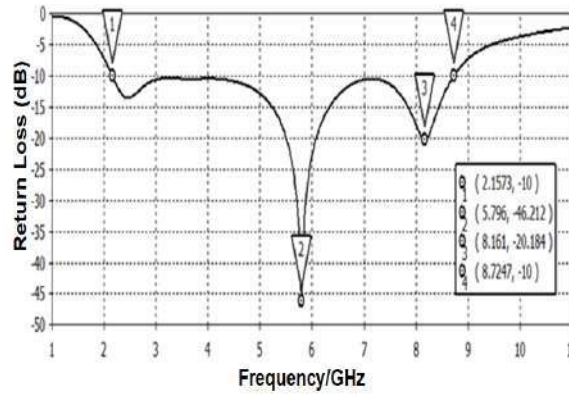


Figure 11. Return loss Versus Frequency of simulation result.

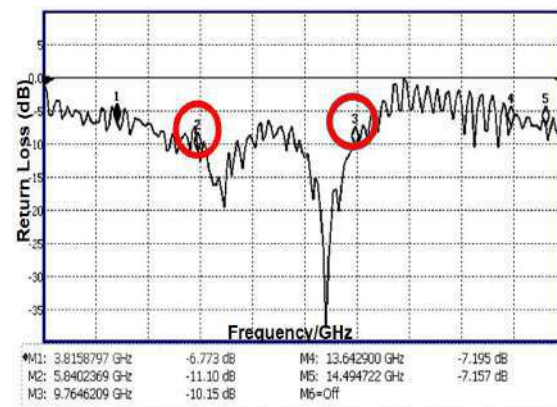


Figure 12. Return loss Versus Frequency of measurement result.

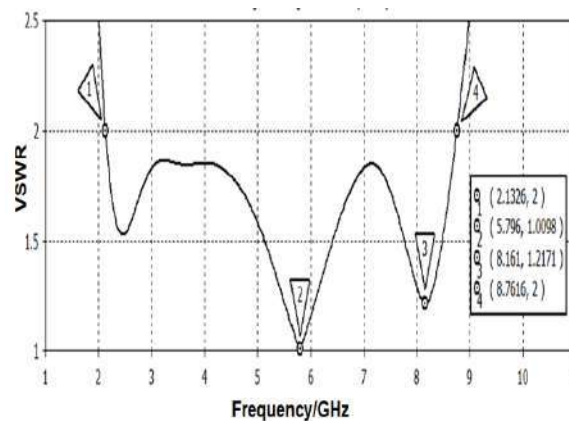


Figure 13. VSWR Versus Frequency of the simulation result.



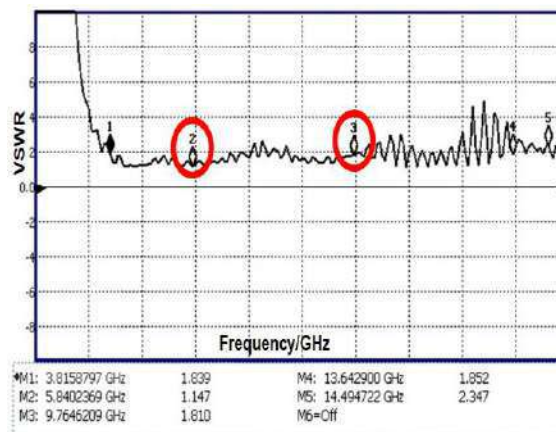


Figure 14. VSWR Versus Frequency of measurement result.

### Radiation Pattern

Figure 15 and Figure 16 show the shape of the plane (theta) and angular (phi) radiation patterns normalized at the resonant frequencies of 5.796GHz and 8.161 GHz. The formed radiation obtained the maximum directivity (Gain) values of 2.61dBi and 5.18dBi. Figure 15 and Figure 16 The radiation polarization of each frequency takes the form of bidirectional (Main lobe directional) with the angle plane ( $\phi$ ) being

161<sup>0</sup> and 156<sup>0</sup>, thus forming an omnidirectional radiation polarity.

The omnidirectional radiation polarization forms the polarization of the two resonant frequencies in the theta plane with two beam width angles. Figure 17 shows at the frequency of 5.796 GHz, the maximum beam width with a magnitude of 3dB is 84.5 degrees. Figure 18 shows the beam-width angle at the frequency of 8.161 GHz is 52.90 degrees.

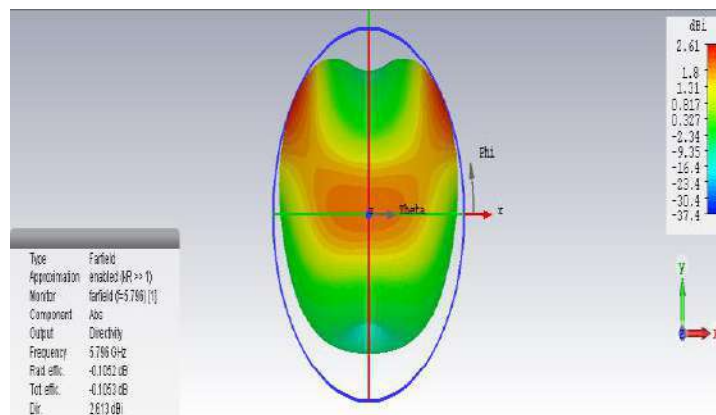


Figure 15. Radiation pattern at a frequency of 5.796 GHz

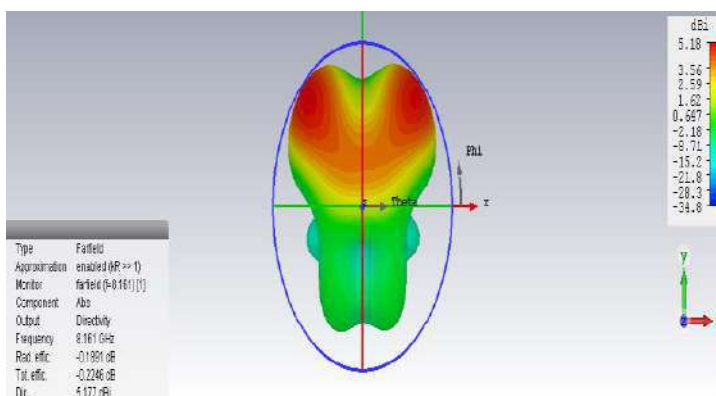


Figure 16. Radiation pattern at a frequency of 8.161 GHz

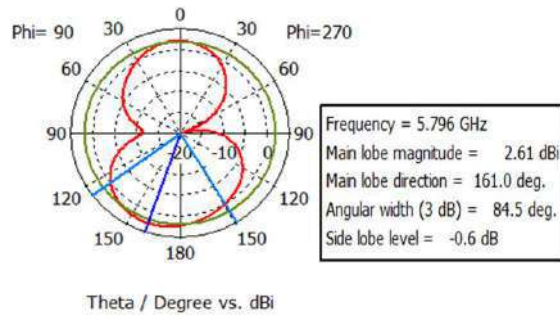


Figure 17. Far-field on the frequency of 5.796 GHz in the theta

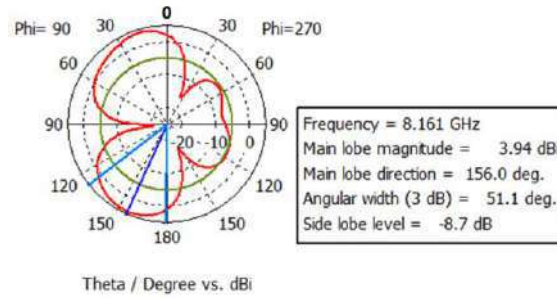


Figure 18. Far-field on the frequency of 8.161 GHz in the theta

**Prototype Antenna**

Figures 19(a) and 19(b) show the shape of the antenna prototype fabricated using the RT DUROID substrate material, which has dimensions of 40 x 40 millimeters. This prototype was built with the etching process. Figure 19(a) shows the front view of an antenna structure consisting of a patch and a power supply line with an attachment. Furthermore, Figure 19(b) shows the underside shape of the ground plane with the DGS technique.

Table 3 shows the antenna design performance resulting from the simulation and measurement methods. As a UWB monopole antenna, where the absolute bandwidth requirements are above 500MHz fractional above 0.2%. While the cut-off frequency range of the simulation and measurement results covers the C-Band and X-band spectrum areas. The antenna radiation pattern is omnidirectional with a beam width above 80 degrees with a maximum directivity (Gain) of 5.18dBi.

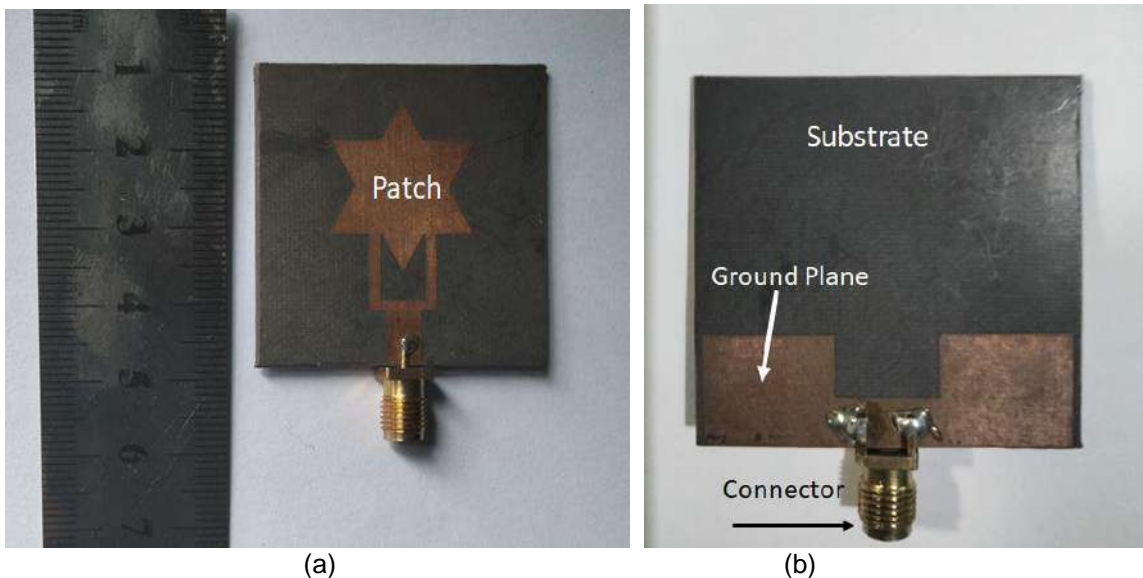


Figure 19. (a) View (b) Bottom, Prototype of Antenna



Table 3. Performance of Antenna Design

Parameters	Simulation	Measurement
Bandwidth	6.5674 GHz	3.92 GHz
Absolut Bandwidth	1.2%	0.5%
Fractional Frequency Range	2.157 -8.724GHz	5.84-9.76GHz
VSWR max	< 2	1,8
Impedance	50 $\Omega$	50 $\Omega$
Polarization	Vertical	NA
Radiation Pattern	omnidirectional	NA
Gain max	5.18dBi	NA
3dB Beam Width H-Plan	84.5 Degree	NA
3dB Beam Width E-Plan	52.90 Degree	NA

### CONCLUSION

The result of minimalist dimensions and compact (40mm x 40mm) is an omnidirectional monopole antenna. Performance in operating in the UWB frequency region (3.1-10.6GHz), where the bandwidth of return loss <-10 dB and VSWR <2. The results of the bandwidth measurement test obtained were 40% (absolute) and 0.7% (fractional) smaller than the simulation. For applications, wireless communication support is measured in the working frequency range of Wireless LAN (5.15 to 5.85 GHz) C-Band and X-Band satellite downlink communications (7.1 to 7.6 GHz). The results of the overall antenna design support the development of UWB technology for high-speed network and data access.

### ACKNOWLEDGMENT

Thank you to LP2MK, Darma Persada University, for funding this research, and to Muhammad Rega, a student, for helping with the simulation process. Hopefully, in the future, you will be enabled to conduct better research and contribute to technological developments.

### REFERENCES

- [1] NN, "Federal Communications Commission," 2002. Accessed: Feb. 02, 2022. [Online]. Available: [https://transition.fcc.gov/Bureaus/Engineering\\_Technology/Orders/2002/fcc02048](https://transition.fcc.gov/Bureaus/Engineering_Technology/Orders/2002/fcc02048)
- [2] A. Sarkar, S. Sultana, A. Paul, and M. M. Rashid, "Study on Ultra-Wideband (UWB) System and Its Applications," *Journal of Bangladesh Electron*, vol. 18, no. 1–3, pp. 47-54, 2018.
- [3] NN, "Characteristics of ultra-wideband technology." *Rec. ITU-R*, SM.1755-0, pp. 1-20, 2006.
- [4] M. Shi, L. Cui, H. Liu, M. Lv, and X. Sun, "A New UWB Antenna with Band-Notched Characteristic," *Progress In Electromagnetics Research M*, vol. 74, pp. 201–209, 2018, doi: 10.2528/PIERM18081002
- [5] Q. M. Hamza, S. M. Nabil and M. Hassan, "Microstrip Patch Antenna for Ultra-Wideband Applications," *2018 International Symposium on Advanced Electrical and Communication Technologies (ISAECT)*, Rabat, Morocco, 2018, pp. 1-4, doi: 10.1109/ISAECT.2018.8618854.
- [6] X. Ling, "Ultra-Wideband Antenna and Design," in *Ultra-Wideband - Current Status and Future Trends*, InTech, 2012. doi: 10.5772/47805.
- [7] O. P. Kumar, P. Kumar, T. Ali, P. Kumar, and S. Vincent, "Ultrawideband Antennas: Growth and Evolution," *Micromachines*, vol. 13, no. 1, Jan. 01, 2022. doi: 10.3390/mi13010060.
- [8] J. Becker, D. Filipovic, H. Schantz, and S.-Y. Suh, "Ultra-Wideband Antennas," *International Journal of Antennas and Propagation*, vol. 2008, ID: 731247, pp. 2, 2008, doi: 10.1155/2008/731247
- [9] E. K. I. Hamad and A. H. Radwan, "Compact UWB antenna for wireless personal area networks," *2013 Saudi International Electronics, Communications and Photonics Conference*, Riyadh, Saudi Arabia, 2013, pp. 1-4, doi: 10.1109/SIEPCPC.2013.6551021.
- [10] D. Xinzhong & S. R. Dueñas, "Design of a DS-UWB Transceiver," *Ultra Wideband Communications: Novel Trends - System, Architecture and Implementation*, March, pp. 82, 2005.
- [11] D. Coppens, A. Shahid, S. Lemey, B. Van Herbruggen, C. Marshall and E. De Poorter, "An Overview of UWB Standards and Organizations (IEEE 802.15.4, FiRa, Apple): Interoperability Aspects and Future Research Directions," in *IEEE Access*, vol. 10, pp. 70219-70241, 2022, doi: 10.1109/ACCESS.2022.3187410.
- [12] M. Abu Nasr, M. K. Ouda, and S. O. Ouda, "Design of Star-Shaped Microstrip Patch Antenna for Ultra Wideband (UWB) Applications," *International Journal of Wireless & Mobile Networks*, vol. 5, no. 4, pp. 65-73, Aug. 2013, doi: 10.5121/ijwmn.2013.5405.
- [13] Y. Rahayu and I. A. Pohan, "Design of rectangular with 3 slot microstrip antenna for application lte 2.1 GHz," *SINERGI*, vol. 22, no. 2, pp. 127-131, 2018, doi: 10.22441/sinergi.2018.2.009.
- [14] S. Khade, M. Bhagat, S. Tompe, and S. Khatri, "Design of Star-Shaped Fractal

- Antenna for Wireless Applications,” vol. 134, no. 4, pp. 41-43, 2018, doi: 10.5120/ijca2016907913.
- [15] M. K. Khandelwal, B. K. Kanaujia, and S. Kumar, “Defected ground structure: Fundamentals, analysis, and applications in modern wireless trends,” *International Journal of Antennas and Propagation*, vol. 2017, 2017. doi 10.1155/2017/2018527.
- [16] A. Kumar and K. V. Machavaram, “Microstrip filter with defected ground structure: A close perspective,” *International Journal of Microwave and Wireless Technologies*, vol. 5, no. 5, pp. 589–602, 2013, doi: 10.1017/S1759078713000639.
- [17] R. Corporation, “RT/duroid 5880LZ High Frequency Laminates Data Sheet,” 2021. [Online]. Available: [www.rogerscorp.com](http://www.rogerscorp.com)
- [18] W. N. Najwa, W. Marzudi, Z. Z. Abidin, S. H. Dahlan, K. N. Ramli, and M. R. Kamarudin, “Performance of Star Patch Antenna on A Paper Substrate Materials,” *ARPN Journal of Engineering and Applied Sciences*, vol. 10, no. 19, pp. 8606-8619, 2015, [Online]. Available: [www.arpnjournals.com](http://www.arpnjournals.com)
- [19] S. Sotyohadi, R. Afandi, and D. Rachmad Hadi, “Design and Bandwidth Optimization on Triangle Patch Microstrip Antenna for WLAN 2.4 GHz,” in *MATEC Web of Conferences*, vol. 164, Apr. 2018, doi: 10.1051/mateconf/201816401042.
- [20] K. Chang, I. Bahl and V. Nair, *RF and Microwave Circuit and Component Design for Wireless Systems*, vol. 63. Wiley, 2002.
- [21] K. Chang, *RF and microwave wireless systems*, John Wiley & Sons, Inc., 2000
- [22] C.-T. Chiang, U. Tunku, and A. Rahman Malaysia, “Ultra Wideband Power Divider Using Tapered Line,” *Progress In Electromagnetics Research*, vol. 106, pp. 61-73, 2010, doi: 10.2528/PIER10061603
- [23] L. J. Berens, “Design, Analysis, and Construction of an Equal Split Wilkinson Power Divider,” Master Thesis, Marquette University, US, 2012.
- [24] S. Johnson, “Microstrip and CPW Power Divider Design PathWave Advanced Design System (ADS),” 2022
- [25] A. Nouri and G. R. Dadashzadeh, “A compact UWB band-notched printed monopole antenna with defected ground structure,” *IEEE Antennas Wirel. Propag. Lett.*, vol. 10, pp. 1178–1181, 2011, doi: 10.1109/LAWP.2011.2171312.
- [26] Rahul Sharma and Dr A. N. Mishara, “Analysis and Design of Microstrip Antenna with Defected Ground Structure for UWB Application,” *International Journal of Engineering Research & Technology*, vol. V5, no. 01, pp. 810–812, 2016, doi: 10.17577/ijertv5is010636.
- [27] D. Rusdiyanto, C. Apriono, D. W. Astuti, and M. Muslim, “Bandwidth and Gain Enhancement of Microstrip Antenna Using Defected Ground Structure and Horizontal Patch Gap,” *SINERGI*, vol. 25, no. 2, pp. 153-158, 2021, doi: 10.22441/sinergi.2021.2.006.
- [28] M. Hussain *et al.*, “Bandwidth and Gain Enhancement of a CPW Antenna Using Frequency Selective Surface for UWB Applications,” *Micromachines*, vol. 14, no. 3, pp. 591, 2023, doi: 10.3390/mi14030591.
- [29] K. Mandal, “A Review on Printed Monopole Antenna for UWB Applications,” *International Journal of Advanced Research in Computer and Communication Engineering*, vol. 4, no. 2, pp. 508-510, 2015, doi: 10.17148/IJARCCCE.2015.412145.
- [30] A. Firdausi, L. Damayanti, G. P. N. Hakim, U. Umairah and M. Alaydrus, " Design of A Dual-Band Microstrip Antenna for 5G Communication," *Journal of Integrated and Advanced Engineering (JIAE)*, vol. 1, no. 1, pp. 65-72, 2021, doi: 10.51662/jiae.v1i1

**FAKULTAS TEKNIK  
UNIVERSITAS MERCU BUANA**

Jl. Meruya Selatan, Kembangan, Jakarta Barat 11650, Jakarta, Indonesia

Telp: +6221-5849816, Fax: +6221-5871335

<http://www.mercubuanaa.ac.id>



# rev2

*by* Paper Pak Darsono

---

**Submission date:** 22-Jun-2023 05:32AM (UTC+0700)

**Submission ID:** 2120539018

**File name:** Manuscript\_RV-SINERGI\_21-06-23\_M.\_Darsono-Rev-2.doc (2.34M)

**Word count:** 3932

**Character count:** 21472



<sup>3</sup>  
**Optimization of Ultra-Wideband Bandwidth for The Design of Microstrip Monopole Antennas Using Defected Ground Structure and Star-Shaped Patches**



M.Darsono<sup>7</sup>, Muhammad Rega<sup>2</sup>

<sup>1</sup>Department of Electrical Engineering, Faculty of Engineering, Universitas Dharma Persada, Indonesia

<sup>2</sup>Department of Electrical Engineering, Faculty of Engineering, Universitas Dharma Persada, Indonesia

**Abstract**

This paper presents a <sup>28</sup> design of a monopole microstrip antenna developed to support Ultra-wideband (3.1 -10.6 GHz) technology wireless communication systems. An antenna with minimalist dimensions operates on C-Band (wireless LAN) and X-Band (downlink satellite) frequencies. The antenna profile has a star shape patch on the top side and the use of the DGS technique on the bottom side on RT DUROID substrate media. The design uses a simulation method using software and measurement tests on antenna prototype<sup>40</sup>s to obtain parameters and antenna performance characteristics. The results of the measurement test, the bandwidth return loss < -10 dB has a difference of 40% (absolute) and 0.7% (Fractional) lower than the simulation when VSWR < 2. The radiation pattern forms an omnidirectional with a maximum directivity (Gain) of 5.18dBi with polarization vertical. Overall, the UWB monopole antenna design results have a low profile, compact, small size, and support mobile communication devices.

This is an open-access article under the [CC BY-NC](#) license



**Keywords:**

Antenna;  
Star Patch;  
Simulation;  
DGS;  
UWB

**Article History:**

Received:  
Revised:  
Accepted:  
Published:

<sup>7</sup>  
**Corresponding Author:**  
M. Darsono

Department of Electrical  
Engineering, Faculty of  
Engineering, Universitas Dharma  
Persada, Indonesia

Email: <sup>16</sup>  
[em\\_darsono@ft.unsada.ac.id](mailto:em_darsono@ft.unsada.ac.id)

**INTRODUCTION**

The Antenna is a transducer designed to transmit or receive electromagnetic waves. Microstrip antennas have several advantages over conventional microwave antennas and are therefore widely<sup>2</sup> used in many practical applications. On February 14, 2002, the Federal Communications Commission (FCC) amended the Part 15 rules which govern unlicensed radio devices to include the operation of Ultra-Wideband (UWB) devices. The FCC also allocated a bandwidth of 7.5GHz, i.e., from 3.1GHz to 10.6GHz to UWB applications, by far the largest spectrum allocation for unlicensed use the FCC has ever granted<sup>1</sup>.

<sup>4</sup> On December 15, 2004, the FCC issued its Second Report on UWB. This report allows for greater flexibility in the introduction of huge systems and devices that do not satisfy the definition of UWB technology. The amended legislation raises the peak emission power limits of wide-bandwidth devices to the same level as UWB devices in the three formerly<sup>4</sup> unlicensed frequency bands, namely 5925-7250 MHz, 16.2-17.2 GHz, and 23.12-29 GHz. The availability of various services in narrow bands, such as Wireless LAN (WLAN) in the 5.15 to 5.85 GHz frequency region, X-region satellite downlink communication in the 7.1 to 7.6 GHz band, and Direct Communication, is the main issue with UWB antennas. Broadcast



42  
Satellite (DBS) operates in the frequency range of 11.7 to 12.5 GHz [2]. This results in electromagnetic interference problems in the UWB system [3, 4, 5].

UWB antennas have their charms and challenges in their design, according to the FCC, as a crucial component of the UWB system for wireless communication. As a crucial component of the UWB system, UWB antennas must have a compact size, lightweight, omnidirectional radiation pattern, and all other properties required for UWB communication. As a result, there is a lot of interest in UWB technology research and development [6, 7, 8, 9].

15 Figure 1 UWB technology is appropriate for a wide range of applications, including communications, geo-location, positioning, and radar or sensor applications. The UWB system has advanced technologically for more than 40 years [2].

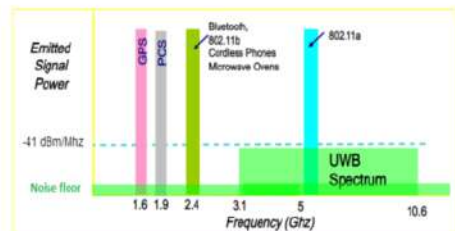


Figure 1. UWB versus other Radio Communication Systems [2].

15 According to the Shannon-Hartley theorem, channel capacity in this system improves linearly as bandwidth increases and declines logarithmically when the signal-to-noise ratio (SNR) diminishes [10]. UWB technology's power is incredibly low and close to the noise level. As a result, the UWB system is power limited rather than band-restricted, as in the narrowband situation [2] [11].

Several designs have been published to achieve the UWB frequency band, including the genetic algorithm, rectangular slot, round diamond, trident form, Quasi-spherical, Vivaldi antipodal, and many others. Ultra-wideband (UWB), a radio transmission method with a bandwidth surpassing 500MHz or at least 20% of the central frequency, is a game-changing approach for short-range high-bandwidth wireless communication [3] [10].

The design of a compact ultra-wideband antenna printed on short-range radio devices plays an important part in current wireless communications in recent RF communications and remote sensing

applications at radio, microwave, and terahertz frequencies. It is a short-range communications technique that uses no carriers and transfers data in the form of very short pulses [2] [7].

Several works that have examined UWB microstrip antennas with the usage of star patches as slits or radiating patches have demonstrated good values with the support of specific grounding models [12]. The grounding model or technique is critical for obtaining a wide bandwidth. This criterion heavily relies on fractal geometry. Because fractals have non-integral dimensions, their propensity to fill space can be exploited to reduce antenna size [13]. The Method of the Moment analysis technique is used to optimize the outcomes by the design goal.

Microstrip antenna development that optimizes bandwidth can be performed through the use of techniques such as coupling proximity, Electromagnetic Band Gap (EBG), and Defected Ground Structure (DGS). In this study, the Electromagnetic Band Gap method, which is most commonly used at UWB frequencies, was used. At a specific frequency range, electromagnetic waves flow through the EBG, a periodic structure. On the ground plane construction, which is located at the center point, the notched band technique is applied. There are several methods for obtaining notch bands, including [14, 15].

## METHOD

The goal of the antenna design study is to create a simple, compact monopole antenna model that can operate in the UWB frequency spectrum. Using the Defected Ground Structure approach, obtain bandwidth optimization on the outcomes of the antenna design performance. Rogers-Corp RT DUROID 5880 substrates have a dielectric constant of 2.2, a thickness of 1.57mm, and a loss tangent of 0.002 [16].

In this study, a simulation model was run using moment application software to generate data from an overall antenna design. The goal of this research was to develop a microstrip antenna prototype that might be employed in wireless communication applications. The was created to be small and low-profile.

## Antenna Design

Magnetic coupling technology is used in the antenna design of the EBG method's planar monopole antenna. The patch is built on the top layer of the substrate material in the opposite orientation as the ground plane. A particular star-shaped patch is made using two equilateral triangular patches.



In this, a star-shaped patch is made by fusing two triangles and rotating the angle by 180 degrees Figure 2 and Figure 3[17].

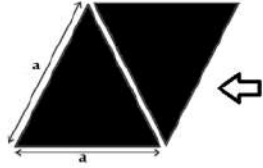


Figure 2. Triangular patch merge direction.




Figure 3. Star Patch.

The basic shape of the star patch is formed by two triangular patches. Crosswise, the two triangular patches are 180 degrees apart. The equilateral triangular patch's shape can be determined by calculating the side lengths of the patch. The dimensional value determines the resonance substrate material's resonance frequency and dielectric constant are order modes in the Transverse Magnetic Wave Propagation (TM<sub>mn</sub>) dominating mode. To determine the triangle's side length, apply the equation below[17,18].

$$fr_{mn} = \frac{2c}{3a\sqrt{\epsilon_r - 4\epsilon_{eff}}} \sqrt{(n^2 + nm + m^2)} \quad (1)$$

Where  $f_r$  is the relative dielectric constant of the material,  $\epsilon_{eff}$  is the dielectric material's effective permittivity, and  $f_r$  is the resonant frequency in gigahertz. The speed of light is known as  $C$  ( $3 \times 10^8$  m/s).  $m = 1$  and  $n = 0$  in the case of the dominant mode (TM<sub>01</sub>). As shown below, the second equation is generated by lowering the first equation.

$$fr = \frac{2c}{3a\sqrt{\epsilon_r}} \quad (2)$$


The following equation can be used to calculate the length of the triangle's side (a).

$$a = \frac{2c}{3f_r\sqrt{\epsilon_r}} \quad (3)$$

### The Star Patch Design

To determine the dimension value of the star patch, begin with an equilateral triangle-shaped patch. The operating range of UWB technology is 3.1 GHz to 10.6 GHz, which includes the C and X band frequencies. The resonance frequency ( $f_r$ ) or core frequency in the present study is 6.5 GHz, and the thickness ( $h$ ) and dielectric constant ( $r$ ) of the RT DUROID substrate are 1.57 mm and 2.2, respectively.

The side length of the triangle patch may be calculated using equation 3, and the result is 20 mm with a 60-degree angle on each side, as shown in Figure 4

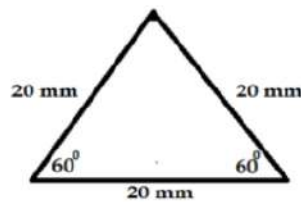

Gambar 4. Triangular patch design.

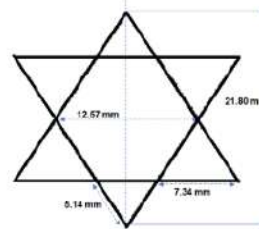


Figure 5. Star patch design.

The size of the star patch created by joining two equilateral triangles is seen in Figure 5. The diagonals of the star angles in the figure's two long sides are 12.57 mm and 21.8 mm. Two sides with lengths of 5.14 mm and 7.34 mm make up the corner of the triangle's junction.

### Transmission Line

The microstrip transmission line is part of the antenna design element that functions as a power supply. The characteristic impedance of the microstrip transmission line can be calculated by analyzing the width of the line above the conductor's surface to the thickness of the substrate material. Figure 6 shows a profile of a microstrip transmission line depending on the value of the conductor width ( $w$ ) and the thickness ( $h$ ) of the substrate layer.

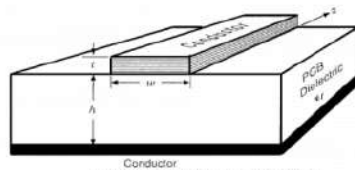


Figure 6. Microstrip line

The medium substrate type requirements define a microstrip transmission line's characteristic impedance ( $Z_0$ ). When the line width ( $w$ ) to substrate thickness ( $h$ ) ratio is greater than one ( $w/h > 1$ ), the following equation can be used to calculate the characteristic impedance of the microstrip line [19,20]:

$$Z_0 = \frac{[120\pi\sqrt{\epsilon_{eff}}]}{h \left[ 1.393 + 0.667 \ln \left( 1.444 + \frac{w}{h} \right) \right]} \quad (4)$$

Where  $Z_0$  is the characteristic impedance in Ohms,  $\epsilon_{eff}$  is the material's relative dielectric constant, the substrate thickness is in meters, and  $w$  is the transmission line width in meters. Using equation 4, we can calculate that the transmission line width is 4.8 mm when the characteristic impedance ( $Z_0$ ) is 50Ω.

**T-Junction Power Divider**

For this research microwave transmission line as a power supply point to a loaded patch, the T-junction power divider transmission line technique is used. T-junction microstrip is a technique of several types of microstrips in system telecommunication. Tapered microstrip is often found as a power separator or also known as a splitter. The T-Junction power divider circuit shown in Figure 7 is a common design for microstrip antennas, where its performance is comparable to that of the three-port Wilkinson power divider [21]. The impedance value of the circuit is made up of three fundamental components: an input line ( $Z_0$ ), two output lines ( $Z_1$ ), and ( $Z_2$ ). There is no isolation between the output ports so other than at the T-junction [22].




Figure 7. T-Junction Power Divider [22].

The third transmission line impedance relationship of the T-junction power divider is as follows:

$$\frac{1}{Z_0} = \frac{1}{Z_1} + \frac{1}{Z_2} + jB \quad (5)$$

Where  $Z_0$  is the input line's characteristic impedance,  $Z_1$  and  $Z_2$  are the output lines' characteristic impedances, and  $B$  is the reactance formed at the junction of the three lines. As a result, given an input impedance, the two output impedances can be matched to it. Furthermore, if  $B$  (imaginary side) is assumed to be zero, the value of the characteristic impedance of all becomes real. So, using the following equation, we established a relationship value for the three impedances of  $Z_0$ ,  $Z_1$ , and  $Z_2$  [20][23]:

$$\frac{1}{Z_0} = \frac{1}{Z_1} + \frac{1}{Z_2} \quad (6)$$

If the characteristic impedance ( $Z_0$ ) in equation 4 is 50Ω, then the output line impedances ( $Z_1$  and  $Z_2$ ) are 100Ω, respectively. As an outcome, the impedance of  $Z_1$  and  $Z_2$  has a 1.4 mm line width in the design of the microstrip transmission line.

**Defected Ground Structure (DGS) Design**

This technique merely denotes the placement of a "defect," which is sometimes considered an approximate approximation of an infinite, perfectly conducting current sink, in the plane's ground. Although the additional DGS perturbations modify the homogeneity of the ground plane, they do not cause it to be defective. The main component of DGS is a resonant gap or slot in the ground metal that is positioned precisely beneath a transmission line and is angled for effective coupling to the line. DGS can be used as a filter in antennas operating in the UWB spectrum to reduce interference effects [14,15][24].

This is the most common usage of DGS for the antenna because it can reduce side lobes in phase arrays, improve the performance of couplers and power dividers, and minimize the response to band signals for both transmit and receive [25]. This study employs different square-type forms as part of the DGS technique. The geometry of the DGS construction using a microstrip antenna's ground plane is depicted in Figure 8.  $L_g$  and  $W_g$  are the length and width of the ground plane on the DGS side of the construction, respectively. For a notch the same size as the ground plane's opening ( $G_p$ ) [26][27].

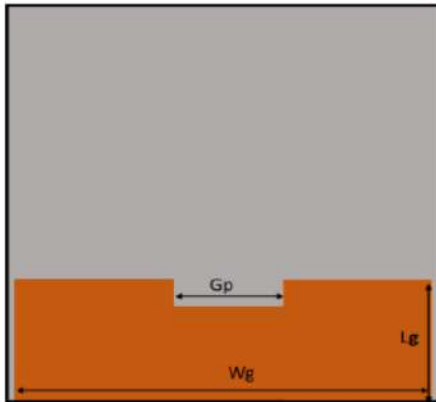


Figure 8. The ground plane's DGS.

### RESULTS AND DISCUSSION

Results for antenna design were obtained in this work using the simulation method. Two things may be seen from the simulation results: the antenna configuration's form and the antenna's parameters. With a length and width of 40 millimeters for the first result, the substrate material has the smallest possible dimensions. The investigation of the antenna's performance parameters follows, including measurements of bandwidth, VSWR, input impedance, radiation pattern, gain, and so forth.

Figure 9 shows the antenna design's front view structure, with the star patch and transmission line structure. Table 1 displays the results of the antenna design configuration in two components. The radiating patch, which is directly connected to the transmission line's source of power, is shown in the picture as a small antenna modeling design. The substrate material used for antenna modeling is required with a length ( $L_s$ ) and width ( $W_s$ ) of 40 mm x 40 mm. A transmission line with a characteristic impedance of  $50 \Omega$  is designed with a length ( $L_t$ ) of 7. Millimeters and a width millimeters 8 millimeters. Furthermore, the T-Junction power divider circuit has two output transmission lines with a gap (GD) of 11 millimeters with a line length (LD) of 10 millimeters and each has an impedance of  $100 \Omega$  (WD).

The lower layer of the ground plane is designed in Figure 10 using the DGS technique, and Table 2 explains the ground plane's dimensions. The ground plane area is limited to a width ( $W_g$ ) of 38 millimeters and a length ( $L_g$ ) of 12.2 millimeters. The notch field has a slit width ( $W_n$ ) of 11 millimeters and a length ( $L_p$ ) of

5 millimeters, where the width of the slit to the edge ( $W_1 = W_2$ ) of the ground plane is 13.5 millimeters each.

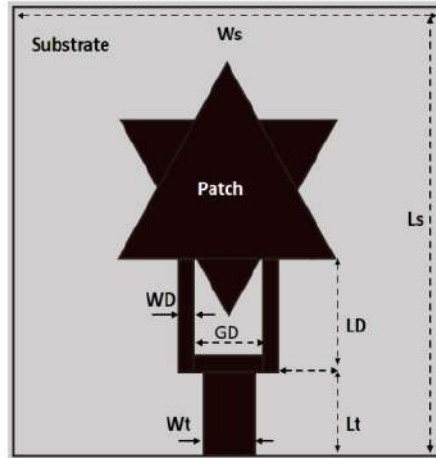


Figure 9. Design of antenna top view.

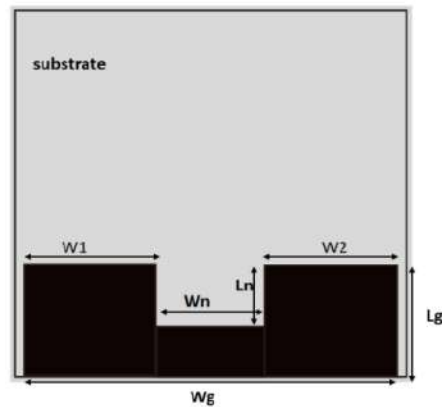


Figure 10. Design of antenna bottom view.

Table 1. Dimension of antenna top view.

Symbol	Dimension	Size (millimeter)
$W_s$	Width of Substrate	40
$L_s$	Length of Substrate	45
$W_t$	Width of the transmission line	4.8
$L_t$	Length of Transmission line	7.4
WD	Width of the output line power the power divider	1.4
GD	The gap between two output line power dividers	11
LD	Length of the output line power divider	10




Table 2. Dimension of antenna bottom view

Symbol	Dimension	Size (millimeter)
Wg	The ground plane's width	38
Lg	The ground plane's length	12.2
W1=W2	Size of the ground's void between the left and rig.	13.5
Wn	Ground plane notch width	11
Ln	Ground plane notch length	6.5


**Parameters S11**

The frequency limit on return loss, as shown in Figure 11 and Figure 12, is used to determine the bandwidth parameter S11. Figure 11 shows the simulation results of the return loss graph versus frequency. The bandwidth of return loss is below -10 dB from 2.1573 GHz (marker1) to 8.7247 GHz (marker4). The results of fractional bandwidth analysis are 1.2% and the absolute bandwidth is 6.5674 GHz. While the measurement results are shown in Figure 12, the graph of return loss on frequency shows the lowest frequency range is 5.84 GHz (marker 2) and the highest frequency is 9.76 GHz (marker 3). The results of fractional bandwidth analysis are 0.5% and the absolute bandwidth is 3.92 GHz. Bandwidth optimization from simulation to measurement with a difference of 0.7% (fractional) or 2.647 GHz (absolute).

Bandwidth impedance matching can be seen in the VSWR (voltage standing wave ratio) value, where the value limit is 1 to 2. The simulation results and measurements of VSWR values can be seen in Figure 13 and Figure 14. Figure 13 shows the VSWR graph versus the frequency of the simulation results, where impedance matching at the frequency 5.796 GHz when the VSWR is 1.0098 (marker 2) and at 8.161GHz when the VSWR is 1.2 (marker 3). While the results of the VSWR measurements are shown in Figure 14, where the impedance matches at the 5.84 GHz frequency when the VSWR is 1.147 (marker 2) and at the 9.76 GHz frequency when the VSWR is 1.8 (marker 3).

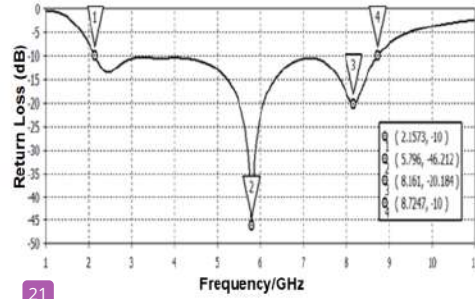

21 Figure 11. Return loss Versus Frequency of simulation result.

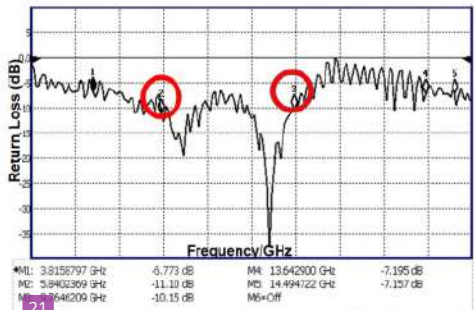

21 Figure 12. Return loss Versus Frequency of measurement result.

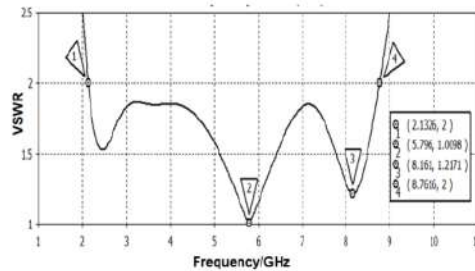


Figure 13. VSWR Versus Frequency of the simulation result.

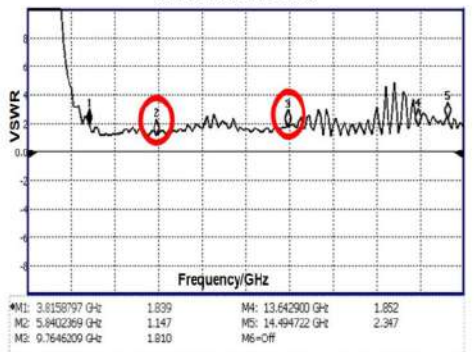


Figure 14. VSWR Versus Frequency of measurement result.

**Radiation Pattern**

Figure 15 and Figure 16 show the shape of the plane (theta) and angular (phi) radiation patterns normalized at the resonant frequencies of 5.796GHz and 8.161 GHz. The formed radiation obtained the maximum directivity (Gain) values of 2.61dBi and 5.18dBi. Figure 15 and Figure 16 The radiation polarization of each frequency takes the form of bidirectional (Main lobe directional) with the angle plane (phi) being 161° and 156°, thus forming an omnidirectional radiation polarity.

The omnidirectional radiation polarization forms the polarization of the two resonant frequencies in the theta plane with two beam width angles. Figure 17 shows at the frequency of 5.796 GHz, the maximum beam width with a magnitude of 3dB is 84.5 degrees. Figure 18 shows the beam-width angle at the frequency of 8.161 GHz is 52.90 degrees.

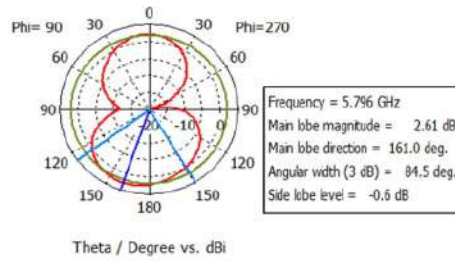


Figure 17. Far-field on the frequency of 5.796 GHz in the theta

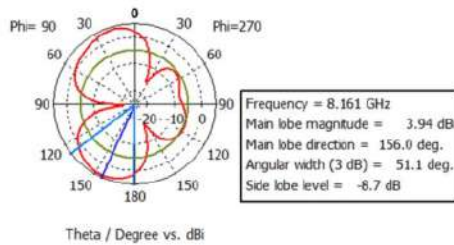


Figure 18. Far-field on the frequency of 8.161 GHz in the theta.

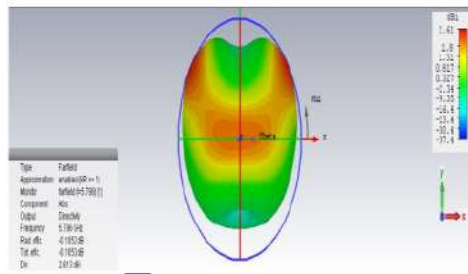


Figure 15. Radiation pattern at a frequency of 5.796 GHz

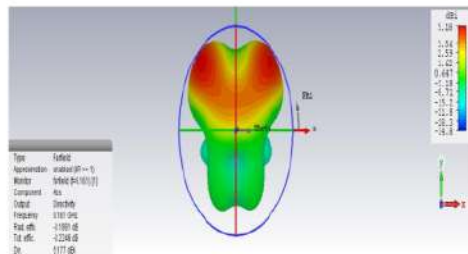


Figure 16. Radiation pattern at a frequency of 8.161 GHz

**Prototype Antenna**

Figures 19(a) and 19(b) show the shape of the antenna prototype fabricated using the RT DUROID substrate material, which has dimensions of 40 x 40 millimeters. This prototype was built with the etching process. Figure 19(a) shows the front view of an antenna structure consisting of a patch and a power supply line with an attachment. Furthermore, Figure 19(b) shows the underside shape of the ground plane with the DGS technique.



(a)



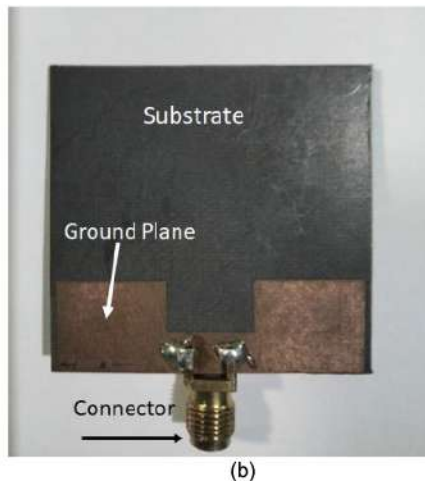


Figure 19. (a) View (b) Bottom, Prototype of antenna.

Table 3 Performance of Antenna Design

Parameters	Simulation	Measurement
Bandwidth	6.5674 GHz	3.92 GHz
Absolut Bandwidth	1.2%	0.5%
Fractional Frequency Range	2.157 -8.724GHz	5.84-9.76GHz
VSWR max	<2	1.8
Impedance	50Ω	20 Ω
Polarization	Vertical	N.A
Radiation Pattern	omnidirectional	N.A
Gain max	5.18dBi	N.A
3dB Beam Width	84.5 Degree	N.A
H-Plan 3dB Beam Width	52.90 Degree	N.A
E-Plan		

Table 3 shows the antenna design performance resulting from the simulation and measurement methods. As a UWB monopole antenna, where the absolute bandwidth requirements are above 500MHz fractional above 0.2%. While the cut-off frequency range of the simulation and measurement results covers the C-Band and X-band spectrum areas. The antenna radiation pattern is omnidirectional with a beam width above 80 degrees with a maximum directivity (Gain) of 5.18dBi.

### CONCLUSION

The result of minimalist dimensions and compact (40mm x 40mm) is an omnidirectional monopole antenna. Performance in operating in the UWB frequency region (3.1-10.6GHz), where the bandwidth of return loss <10 dB and VSWR <2. The results of the bandwidth measurement test obtained were 40%

(absolute) and 0.7% (fractional) smaller than the simulation. For applications, wireless communication support is measured in the working frequency range of Wireless LAN (5.15 to 5.85 GHz) C-Band and X-Band satellite downlink communications (7.1 to 7.6 GHz). The results of the overall antenna design support the development of UWB technology for high-speed network and data access.

### ACKNOWLEDGMENT

This research was supported and funded by Darma Persada University's LP2MK through an internal grant for the 2020-2021 academic year. To Muhammad Rega's team members, thank you for helping in the antenna design process.

### REFERENCES

- [1] "Federal Communications Commission," 2002. Accessed: Feb. 02, 2022. [Online]. Available: [https://transition.fcc.gov/Bureaus/Engineering\\_Technology/Orders/2002/fcc02048](https://transition.fcc.gov/Bureaus/Engineering_Technology/Orders/2002/fcc02048)
- [2] A. Sarkar, S. Sultana, A. Paul, and M. M. Rashid, "Study on Ultra-Wideband (UWB) System and Its Applications," 2018. [Online]. Available: <https://www.researchgate.net/publication/352561601>
- [3] Itu-r, "Characteristics of ultra-wideband technology."
- [4] M. Shi, L. Cui, H. Liu, M. Lv, and X. Sun, "A New UWB Antenna with Band-Notched Characteristic," vol. 74, pp. 201–209, 2018.
- [5] S. Sethi, E. Manish Mehta, and A. Professor, "JESC: Microstrip Patch Antenna for UWB Applications: An Overview," *Int. J. Eng. Sci. Comput.*, 2016, doi: 10.4010/2016.1775.
- [6] X. Ling, "Ultra-Wideband Antenna and Design," in *Ultra-Wideband - Current Status and Future Trends*, InTech, 2012. doi: 10.5772/47805.
- [7] O. P. Kumar, P. Kumar, T. Ali, P. Kumar, and S. Vincent, "Ultrawideband Antennas: Growth and Evolution," *Micromachines*, vol. 13, no. 1. MDPI, Jan. 01, 2022. doi: 10.3390/mi13010060.
- [8] J. Becker, D. Filipovic, H. Schantz, and S.-Y. Suh, "Ultra-Wideband Antennas."
- [9] E. K. I. Hamad and A. H. Radwan,



- "Compact UWB antenna for wireless personal area networks," 2013. doi: 10.1109/SIEPCPC.2013.6551021.
- [10] Duo Xinzhong & Saúl Rodríguez Dueñas, "Design of a DS-UWB Transceiver," no. March, p. 82, 2005.
- [11] D. Coppens, A. Shahid, S. Lemey, B. V. H. C. Marshall, and E. De Poorter, "An Overview of Ultra-WideBand (UWB) Standards and Organizations (IEEE 802.15.4, FiRa, Apple): Interoperability Aspects and Future Research Directions," Feb. 2022, doi: 10.1109/ACCESS.2022.3187410.
- [12] M. Abu Nasr, M. K. Ouda, and S. O. Ouda, "Design of Star-Shaped Microstrip Patch Antenna for Ultra Wideband (UWB) Applications," *Int. J. Wirel. Mob. Networks*, vol. 5, no. 4, pp. 65–73, Aug. 2013, doi: 10.5121/ijwmn.2013.5405.
- [13] S. Khade, M. Bhagat, S. Tompe, and S. Khatri, "Design of Star-Shaped Fractal Antenna for Wireless Applications," 2018. [Online]. Available: www.jetir.org
- [14] M. K. Khandelwal, B. K. Kanaujia, and S. Kumar, "Defected ground structure: Fundamentals, analysis, and applications in modern wireless trends," *International Journal of Antennas and Propagation*, vol. 2017. Hindawi Limited, 2017. doi 10.1155/2017/2018527.
- [15] A. Kumar and K. V. Machavaram, "Microstrip filter with defected ground structure: A close perspective," *Int. J. Microw. Wirel. Technol.*, vol. 5, no. 5, pp. 589–602, 2013, doi: 10.1017/S1759078713000639.
- [16] R. Corporation, "RT/droid 5880LZ High-Frequency Laminates Data Sheet," 2021. [Online]. Available: www.rogerscorp.com
- [17] W. N. Najwa, W. Marzudi, Z. Z. Abidin, S. H. Dahlan, K. N. Ramli, and M. R. Kamarudin, "Performance of Star Patch Antenna on A Paper Substrate Materials," vol. 10, 2015, [Online]. Available: www.arpnjournals.com
- [18] Sotyohadi, R. Afandi, and D. Rachmad Hadi, "Design and Bandwidth Optimization on Triangle Patch Microstrip Antenna for WLAN 2.4 GHz," in *MATEC Web of Conferences*, Apr. 2018, vol. 164. doi: 10.1051/mateconf/201816401042.
- [19] Kai Chang, Inder Bahl, and Vijay Nair, *RF, and Microwave Circuit and Component Design for Wireless Systems*, vol. 63. Wiley, 2002.
- [20] K. Chang, *RF, and microwave wireless systems*.
- [21] C.-T. Chiang, U. Tunku, and A. Rahman Malaysia, "Ultra Wideband Power Divider Using Tapered Line," 2010.
- [22] L. J. Berens, "Design, Analysis, and Construction of an Equal Split Wilkinson Power Divider," 2012. [Online]. Available: [http://epublications.marquette.edu/these\\_s\\_open/154](http://epublications.marquette.edu/these_s_open/154)
- [23] S. Johnson, "Microstrip and CPW Power Divider Design PathWave Advanced Design System (ADS)," [Online]. Available: www.keysight.com
- [24] A. Nouri and G. R. Dadashzadeh, "A compact UWB band-notched printed monopole antenna with defected ground structure," *IEEE Antennas Wirel. Propag. Lett.*, vol. 10, pp. 1178–1181, 2011, doi: 10.1109/LAWP.2011.2171312.
- [25] Rahul Sharma and Dr. A. N. Mishara, "Analysis and Design of Microstrip Antenna with Defected Ground Structure for UWB Application," *Int. J. Eng. Res.*, vol. V5, no. 01, pp. 810–812, 2016, doi: 10.17577/ijertv5is010636.
- [26] M. Hussain *et al.*, "Bandwidth and Gain Enhancement of a CPW Antenna Using Frequency Selective Surface for UWB Applications," *Micromachines*, vol. 14, no. 3, p. 591, 2023, doi: 10.3390/mi14030591.
- [27] K. Mandal, "IJARCCE A Review on Printed Monopole Antenna for UWB Applications," *Int. J. Adv. Res. Comput. Commun. Eng.*, vol. 4, 2015, doi: 10.17148/IJARCCE.2015.412145.

ORIGINALITY REPORT

---

**22%**  
SIMILARITY INDEX

**19%**  
INTERNET SOURCES

**11%**  
PUBLICATIONS

**11%**  
STUDENT PAPERS

---

PRIMARY SOURCES

---

**1** Submitted to Universitas Mercu Buana  
Student Paper **2%**

---

**2** [www.iaeng.org](http://www.iaeng.org)  
Internet Source **2%**

---

**3** [www.tvassignmenthelp.com](http://www.tvassignmenthelp.com)  
Internet Source **1%**

---

**4** [www.pta.gov.pk](http://www.pta.gov.pk)  
Internet Source **1%**

---

**5** [www.ijert.org](http://www.ijert.org)  
Internet Source **1%**

---

**6** [epublications.marquette.edu](http://epublications.marquette.edu)  
Internet Source **1%**

---

**7** [media.neliti.com](http://media.neliti.com)  
Internet Source **1%**

---

**8** [www.jetir.org](http://www.jetir.org)  
Internet Source **1%**

---

**9** Submitted to Kuala Lumpur Infrastructure  
University College **1%**  
Student Paper

---

10	Submitted to University of Glasgow Student Paper	1 %
11	eprints.utm.my Internet Source	1 %
12	Submitted to Universitas Pendidikan Indonesia Student Paper	<1 %
13	mdpi-res.com Internet Source	<1 %
14	www.mdpi.com Internet Source	<1 %
15	docplayer.net Internet Source	<1 %
16	publikasi.mercubuana.ac.id Internet Source	<1 %
17	Submitted to Queensland University of Technology Student Paper	<1 %
18	ir.vanderbilt.edu Internet Source	<1 %
19	researchspace.ukzn.ac.za Internet Source	<1 %
20	www.wdbc.gov.uk Internet Source	<1 %

21 Ribero, J.M., G. Kossiavas, R. Staraj, and E. Fond. "Dual-frequency antenna circularly polarized for GPS-SDARS operation", IET Seminar Digests, 2007.

Publication

<1 %

22 Submitted to Universiti Putra Malaysia

Student Paper

<1 %

23 Submitted to University of Northumbria at Newcastle

Student Paper

<1 %

24 [dspace.unimap.edu.my](http://dspace.unimap.edu.my)

Internet Source

<1 %

25 Amar Sharma, Puneet Khanna, Kshitij Shinghal, Arun Kumar. "Design of CPW-Fed Antenna with Defected Substrate for Wideband Applications", Journal of Electrical and Computer Engineering, 2016

Publication

<1 %

26 Submitted to Higher Education Commission Pakistan

Student Paper

<1 %

27 Yu-Che Yang, Po-Wei Lee, Hung-Wei Chiu, Yo-Sheng Lin, Guo-Wei Huang, Shey-Shi Lu. "Reconfigurable SiGe Low-Noise Amplifiers With Variable Miller Capacitance", IEEE Transactions on Circuits and Systems I: Regular Papers, 2006

<1 %

28

[link.springer.com](https://link.springer.com)

Internet Source

<1 %

29

[scholar.uwindSOR.ca](https://scholar.uwindSOR.ca)

Internet Source

<1 %

30

[telkomnika.uad.ac.id](https://telkomnika.uad.ac.id)

Internet Source

<1 %

31

"Optical and Wireless Technologies", Springer Science and Business Media LLC, 2020

Publication

<1 %

32

[scholarbank.nus.edu.sg](https://scholarbank.nus.edu.sg)

Internet Source

<1 %

33

"Microelectronic Devices, Circuits and Systems", Springer Science and Business Media LLC, 2022

Publication

<1 %

34

Bhuiyan, MD Shakil, and Nemaï Chandra Karmakar. "Defected Ground Structures for Microwave Applications", Wiley Encyclopedia of Electrical and Electronics Engineering, 2014.

Publication

<1 %

35

Submitted to Istanbul Gelisim University

Student Paper

<1 %

36

Submitted to Lovely Professional University

Student Paper

<1 %

37 Mohamed Nabil. "Chapter 10 Ultra-Wideband Printed Antennas Design", IntechOpen, 2011 <1 %  
Publication

---

38 [aces-society.org](http://aces-society.org) <1 %  
Internet Source

---

39 [digitalcommons.usf.edu](http://digitalcommons.usf.edu) <1 %  
Internet Source

---

40 [jartel.polinema.ac.id](http://jartel.polinema.ac.id) <1 %  
Internet Source

---

41 [jurnal.polindra.ac.id](http://jurnal.polindra.ac.id) <1 %  
Internet Source

---

42 [www.jatit.org](http://www.jatit.org) <1 %  
Internet Source

---

43 Archana Agarwal, Manish Kumar, Priyanka Jain, Shagun Maheshwari. "Ultra wideband tapered microstrip antenna with modified ground plane", 2013 INTERNATIONAL CONFERENCE ON SIGNAL PROCESSING AND COMMUNICATION (ICSC), 2013 <1 %  
Publication

---

Exclude quotes On

Exclude matches Off

Exclude bibliography On



## SINERGI

### COPYRIGHT TRANSFER AGREEMENT

Universitas Mercu Buana (UMB) require a formal written transfer of copyright from the Author (s) for each article published. We, therefore, ask you to read the terms of this agreement, sign in the space provided, and return the complete Form to us at [andi@mercubuana.ac.id](mailto:andi@mercubuana.ac.id). Your cooperation is essential and appreciated. Any delay will result in a delay in publication.

---

The article entitled	:	Optimization of Ultra-Wideband bandwidth for the design of microstrip monopole antennas using Defected Ground Structure and star-shaped patches
Corresponding Author	:	M. Darsono
To be published in	:	SINERGI


---

#### COPYRIGHT TRANSFER

I hereby assign to UMB all rights under copyright that may exist in and to the manuscript identified above and any supplemental tables, illustrations or other information submitted therewith (the "article"), including any associated written or multimedia components or other enhancements accompanying the article submitted to SINERGI in all forms and media (whether now known or hereafter developed), throughout the world, in all languages, for the full term of copyright and all extensions and renewals thereof, effective when and if the article is accepted for publication.

#### GENERAL TERMS

- The undersigned represents that he/she has the power and authority to make and execute this assignment;
- If the article was prepared jointly with other authors, you have informed the co-author(s) of the terms of this copyright transfer and that you are signing on their behalf as their agent, and represent that you are authorized to do so;
- The undersigned agrees to indemnify and hold harmless the UMB from any damage or expense that may arise in the event of a breach of any of the warranties set forth above;
- The article you have submitted to the journal for review is original, has been written by the stated authors and has not been published elsewhere;
- The article is not currently being considered for publication by any other journal and will not be submitted for such review while under review by the journal;
- The article contains no libellous or other unlawful statements and does not contain any plagiarism substance or any materials that violate any personal or proprietary rights of any other person or entity;
- You have obtained written permission from copyright owners for any excerpts from copyrighted works that are included and have credited the sources in your article;
- In the event the above article is not accepted and published or is withdrawn by the Author (s) before acceptance, the foregoing copyright transfer shall become null and void and all materials embodying the article submitted will be destroyed immediately.

Corresponding Author's signature :   
Name (printed) : M. Darsono  
Company or institution : Universitas Darma Persada  
Date : 6/07/2023

---

#### SINERGI

Universitas Mercu Buana

p-ISSN: 1410-2331; e-ISSN: 2460-1217

<http://publikasi.mercubuana.ac.id/index.php/sinergi>

Data Protection: By submitting this Form you are consenting that the personal information provided herein may be used by UMB and its affiliated companies worldwide to contact you concerning the publishing of your article.

#### **RETAINED RIGHTS/TERMS AND CONDITIONS OF PUBLICATION**

1. As an author you (or your employer or institution) may do the following:

- make copies (print or electronic) of the article for your own personal use, including for your own classroom teaching use;
- make copies and distribute such copies (including through e-mail) of the article to research colleagues, for personal use by such colleagues (but not commercially or systematically, e.g. via an e-mail list or list server);
- present the article at a meeting or conference and distribute copies of the article to the delegates attending such meeting;
- for your employer, if the article is a 'work for hire', made within the scope of your employment, your employer may use all or part of the information in the article for other intra-company use (e.g. training);
- retain patent and trademark rights and rights to any process, procedure, or article of manufacture described in the article;
- include the article in full or in part in a thesis or dissertation (provided that this is not to be published commercially);
- use the article or any part thereof in a printed compilation of your works, such as collected writings or lecture notes (subsequent to publication of the article in the journal); and prepare other derivative works, to extend the article into book-length Form, or to otherwise reuse portions or excerpts in other works, with full acknowledgement of its original publication in the journal;
- may reproduce or authorize others to reproduce the article, material extracted from the article, or derivative works for the Author's personal use or for company use, provided that the source and the copyright notice are indicated, the copies are not used in any way that implies UMB endorsement of a product or service of any employer, and the copies themselves are not offered for sale.

All copies, print or electronic, or other use of the paper or article must include the appropriate bibliographic citation for the article's publication in the journal.

2. Requests from third parties

Although authors are permitted to reuse all or portions of the article in other works, this does not include granting third-party requests for reprinting, republishing, or other types of reuse. Requests for all uses not included above, including the authorization of third parties to reproduce or otherwise use all or part of the article (including figures and tables), should be referred to UMB by going to our website at <https://puslit.mercubuana.ac.id/>

3. Author Online Use

- Personal Servers. Authors and/or their employers shall have the right to post the accepted version of articles pre-print version of the article, or revised personal version of the final text of the article (to reflect changes made in the peer review and editing process) on their own personal servers or the servers of their institutions or employers without permission from UMB, provided that the posted version includes a prominently displayed UMB copyright notice and, when published, a full citation to the original publication, including a link to the article abstract in the journal homepage. Authors shall not post the final, published versions of their papers;
- Classroom or Internal Training Use. An author is expressly permitted to post any portion of the accepted version of his/her own articles on the Author's personal website or the servers of the Author's institution or company in connection with the Author's teaching, training, or work responsibilities, provided that the appropriate copyright, credit, and reuse notices appear prominently with the posted material. Examples of permitted uses are lecture materials, course packs, e-reserves, conference presentations, or in-house training courses;
- Electronic Preprints. Before submitting an article to a SINERGI, authors frequently post their manuscripts to their own website, employer's site, or another server inviting constructive colleague comments. Upon submission of an article to SINERGI, an author is required to transfer copyright in the article to UMB, and the Author must update any previously posted version of the article with a prominently displayed UMB copyright notice. Upon publication of an article by the UMB, the Author must replace any previously posted electronic versions of the article with either (1) the complete citation to the work with a Digital Object Identifier (DOI) or a link to the article abstract in SINERGI journal homepage, or (2) the accepted version only (not the final, published version), including the UMB copyright notice and full citation, with a link to the final, published article in journal homepage.

4. Articles in Press (AiP) service

---

## **SINERGI**

Universitas Mercu Buana

p-ISSN: 1410-2331; e-ISSN: 2460-1217

<http://publikasi.mercubuana.ac.id/index.php/sinergi>

UMB may choose to publish an abstract or portions of the paper before we publish it in the journal. However, be sure to contact our Production department immediately if you do not want us to make any such prior publication for any reason, including disclosure of a patentable invention.

#### 5. Author/Employer Rights

If you are employed and prepared the article on a subject within the scope of your employment, the copyright in the article belongs to your employer as a work-for-hire. In that case, UMB assumes that when you sign this Form, you are authorized to do so by your employer and that your employer has consented to the transfer of copyright, to the representation and warranty of publication rights, and all other terms and conditions of this Form. If such authorization and consent have not been given to you, an authorized representative of your employer should sign this Form as the Author.

#### 6. UMB Copyright Ownership

It is the formal policy of UMB to own the copyrights to all copyrightable material in its technical publications and to the individual contributions contained therein to protect the interests of the UMB, its authors and their employers, and, at the same time, to facilitate the appropriate reuse of this material by others. UMB distributes its technical publications worldwide by various means, such as hard copy, microfiche, microfilm, and electronic media. It also abstracts and may translate its publications and articles contained therein for inclusion in various compendiums, collective works, databases and similar publications.

**THIS FORM MUST ACCOMPANY THE SUBMISSION OF THE AUTHOR'S MANUSCRIPT.**  
Questions about the submission of the Form or manuscript should be sent to SINERGI Secretariat.

Universitas Mercu Buana (UMB)  
Fakultas Teknik Universitas Mercu Buana  
Jl. Raya Meruya Selatan, Kembangan, Jakarta 11650  
Tlp./Fax: +62215871335  
e-mail: [sinergi@mercubuana.ac.id](mailto:sinergi@mercubuana.ac.id)

Manuscript of Revision 3:

Before:	After :
Name author: Muhammad Darsono	M. Darsono
Totally of reference: 27 title	Totally of reference: 29 title - Two titles is a reference from Journal "Sinergi" Ref: [27], D. Rusdiyanto, C. Apriono, D. W. Astuti, and M. Muslim, "Bandwidth and Gain Enhancement of Microstrip Antenna Using Defected Ground Structure and Horizontal Patch Gap," <i>Sinergi</i> , vol. 25, no. 2, p. 153, 2021, doi: 10.22441/sinergi.2021.2.006. - Ref:[13] Y. Rahayu and I. A. Pohan, "DESIGN OF RECTANGULAR WITH 3 SLOT MICROSTRIP ANTENNA FOR APPLICATION LTE 2.1 GHz," <i>Sinergi</i> , vol. 22, no. 2, p. 127, 2018, doi: 10.22441/sinergi.2018.2.009.

				4 Tahun 2027
20	Scientific Contributions Oil And Gas	25410520	Kementerian Energi Dan Sumber Daya Mineral	Peringkat 1 Terindeks Bereputasi Internasional mulai Volume 46 Nomor 1 Tahun 2023 sampai Volume 50 Nomor 3 Tahun 2027
21	SINERGI	24601217	Universitas Mercu Buana	Peringkat 1 Terindeks Bereputasi Internasional mulai Volume 27 Nomor 1 Tahun 2023 sampai Volume 31 Nomor 3 Tahun 2027
22	Teosofi: Jurnal Tasawuf dan Pemikiran Islam	2442871X	Universitas Islam Negeri Sunan Ampel Surabaya	Reakreditasi Naik Peringkat dari Peringkat 2 ke Peringkat 1 mulai Volume 12 Nomor 1 Tahun 2022 sampai Volume 16 Nomor 2 Tahun 2026